



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

This very tough enclosure is ideal for demanding environments that require a smaller LED enclosure. For use in both indoor and outdoor applications where dust and water resistance is required. Ideal for refrigerated storage, food processing facilities, beverage and bottling facilities, exterior retail, construction sites and gymnasiums.



FEATURES & BENEFITS

- Compact size
- Poured in place gasket and latches seal the enclosure from hostile environments
- Very tough diffusers resist breakage and reduce replacement costs
- Optional cable, V-hook or ceiling mount accessories
- Very durable
- Easy to clean and service
- Operates in low temperature applications such as refrigerated storage/freezers



DIMENSIONS

26.6"L x 14.5"W x 5.6"H

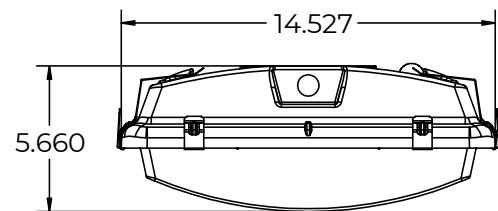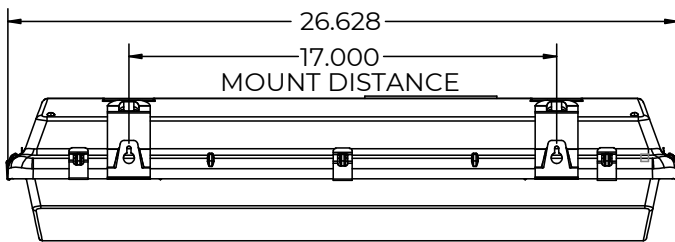



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: VWHBS LED 100 DMV 50

VWHBS LED

1. SERIES	2. GEAR	3. WATTAGE/LUMENS ¹	4. DRIVER ²	5. LENS	6. COLOR TEMP	7. EM
VWHBS	LED	80 80W 8000 Lumens 100 100W 10000 Lumens 140 140W 14000 Lumens	DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming Multivolt DHV 347-480VAC 0-10V Dimming D347V 347VAC 0-10V Dimming TDMV Triac Dimming 120-277VAC D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC	Blank Clear Acrylic FR Frosted Acrylic PC Clear Polycarbonate PF Frosted Polycarbonate	30 3000K 35 3500K 40 4000K 50 5000K	EM Emergency Battery Pack 10W ~ 1700 lumens EM5 Emergency Battery Pack 5W ~ 850 Lumens

Notes:

¹Consult for custom wattage and lumen packages

²Consult for other driver options (Step dimming, Triac dimming)

8. SENSOR	9. CORD	10. PHOTOCELL
OS Occupancy Sensor OSW Occupancy Sensor - Wet Location OSC Occupancy Sensor Cold Temperature OSD Occupancy Sensor - 0-10V Dimmable SS Occupancy Sensor - Internal Microwave	CS Cordset 6' 3 wire CS12 Cordset 12' 3 wire	PC120 Photocell 120V PC277 Photocell 277V

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cord-set	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

ACCESSORIES

H137 V-Hook
VWFHB-MBCM Flexible Ceiling Mount



Surface mount fixture 1.25" from ceiling (VWFHB-MBCM)



V hook (H137) sold individually (need 2 per fixture)

REPLACEMENT PARTS

H203 Stainless Mounting Strap
H199 Zinc Plated Mounting Strap



Accessory available for 3/4" hub for single point mounting



Stainless hardware for mounting straps and latches

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

