



JOB NAME:

CAT#:

TYPE:

APPLICATIONS


This versatile LED all weather, wet location fixture is available standard with black polycarbonate base with a white polycarbonate lens (optional with a white base and frosted prismatic diffuser). Also available with motion sensor.



FEATURES & BENEFITS

- Available in black or white with white or frosted prismatic polycarbonate lenses
- Molded of durable non-corrosive UV resistant resins
- High power factor
- ^cUL_{us} listed for wet locations
- 3 year warranty for MV and INC w/ lamp
- 5 year warranty for LED dimmable 120V
Ambient temperature -40°C - +40°C
- Wall or ceiling mount

DIMENSIONS

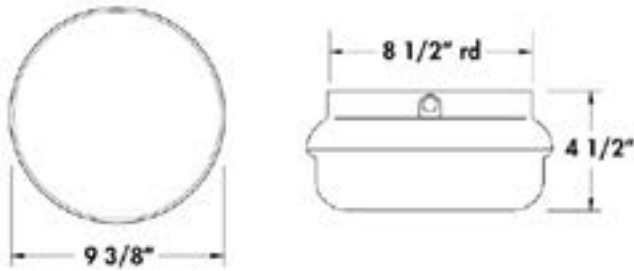

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: FK391 LE800 W W F M

LE800

1. STYLE	2. LIGHT SOURCE	3. COLOR TEMP	4. BODY	5. DIFFUSER	6. EMERGENCY (O) ¹
FK391 Circular	LE800 13W Power Input, CRI 80 (TYP) >88 Lumens Per Watt	W 3000K C 4000K	W White B Black	F Frosted Prismatic W White	EB Emergency Backup
	LE1200 14W Power Input, CRI 80 (TYP) >120 Lumens Per Watt				
	LE1800 22W Power Input, CRI 80 (TYP) >88 Lumens Per Watt				
	L1800 22W Power Input, CRI 74 (TYP) >82 Lumens Per Watt, 120-277V Non Dimmable				

7. SENSOR (O)¹

M Motion Sensor

ORDERING (INCANDESCENT)

EXAMPLE: FK391 I240 W F LWE

I240

1. STYLE	2. LIGHT SOURCE	3. BODY	4. DIFFUSER	5. LAMPING (O) ¹
FK391 Circular	I240 2 X 40W Max	W White B Black	F Frosted Prismatic W White	LWE A19/E26, 3000K LCE A19/E26, 4000K

Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

