



**JOB NAME:**

**CAT#:**

**TYPE:**

### ILLUMINATION

- Ultra bright, energy efficient, long life red or green LEDs

### ELECTRICAL

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only)
- Internal solid-state transfer switch automatically connects the internal battery to the LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



### MOUNTING

- EZ-snap mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount


### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- EZ snap-out chevron directional indicators
- Compact low-profile design

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for damp locations (0°C-50°C)
- Certified to CEC under Title 20 regulations

### DIMENSIONS

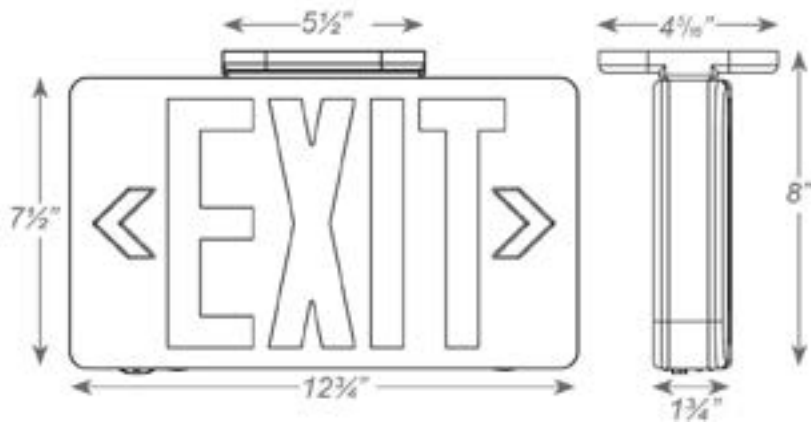

Dimensions and specifications subject to change without notice.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: EZXTEU 2 R W EM SDT

**EZXTEU**

| 1. MODEL      | 2. # OF FACES                                | 3. LETTER COLOR                | 4. HOUSING COLOR                 | 5. BATTERY                                         | 6. DIAGNOSTICS (O) <sup>1</sup>          |
|---------------|----------------------------------------------|--------------------------------|----------------------------------|----------------------------------------------------|------------------------------------------|
| <b>EZXTEU</b> | <b>2</b> Universal/<br>Single/Double<br>Face | <b>R</b> Red<br><b>G</b> Green | <b>W</b> White<br><b>B</b> Black | <b>(blank)</b> AC-Only<br><b>EM</b> Battery Backup | <b>SDT</b> Self-Diagnostics <sup>2</sup> |

| 7. CIRCUITING (O) <sup>1</sup>                   | 8. LISTING (O) <sup>1</sup> | 9. WORDING (O) <sup>1</sup>  |
|--------------------------------------------------|-----------------------------|------------------------------|
| <b>2C</b> Dual Circuit<br>Operation <sup>3</sup> | <b>cUL</b> cUL Listed       | <b>CUSTOM</b> Custom Wording |

**Notes:**

<sup>1</sup>(O) is optional

<sup>2</sup>Available only with EM units

<sup>3</sup>Available only with AC units

Dimensions and specifications subject to change without notice.

