



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Give your facility a clean and sleek look with this LED premium round lensed strip with reflector. This fixture is sure to enhance any environment, provide energy savings, and give better quality lighting. This fixture is cost effective and makes this perfect for: interior warehouse, retail, and utility areas requiring general illumination in a commercial quality strip configuration.



FEATURES & BENEFITS

- End plate doubles as a coupler for continuous row mounting
- Available in 24", 48", and 96" (2', 4', & 8') lengths
- $L_{70} > 50,000$ hrs.
- Min CRI 80
- 5 year warranty.

DIMENSIONS


W x L x H in inches

24 in: 4.25"W x 24.00"L x 3.25"H

48 in: 4.25"W x 48.00"L x 3.25"H

96 in: 4.25"W x 96.00"L x 3.25"H

Reflector W30

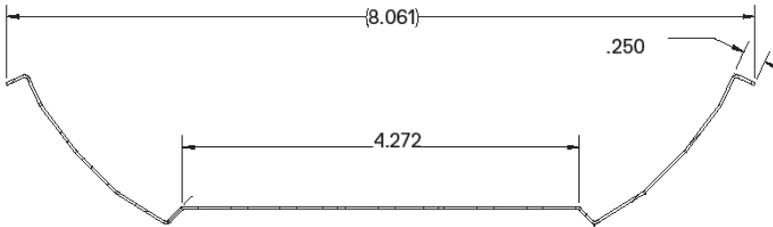




JOB NAME:

CAT#:


TYPE:

DIMENSIONS


96 inch

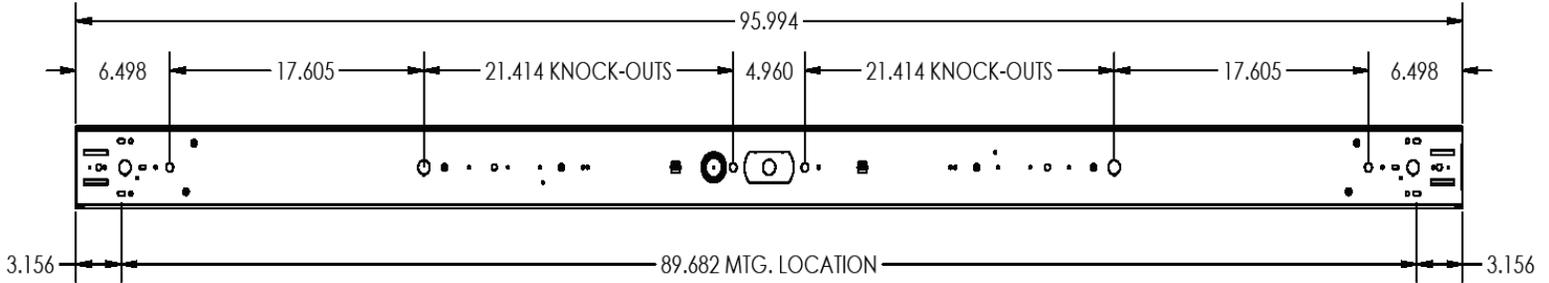

48 inch

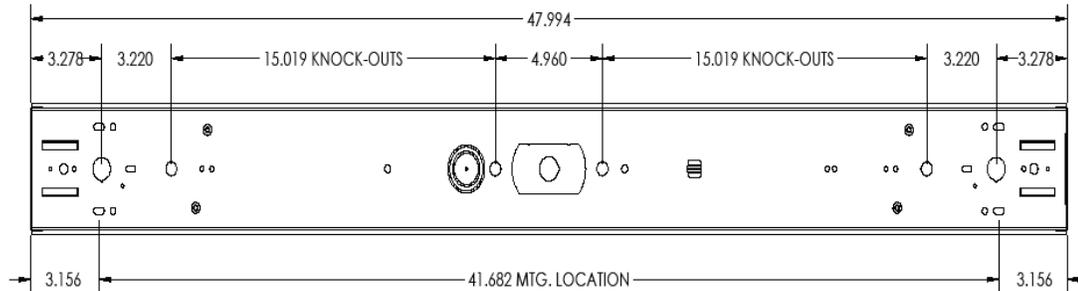

24 inch

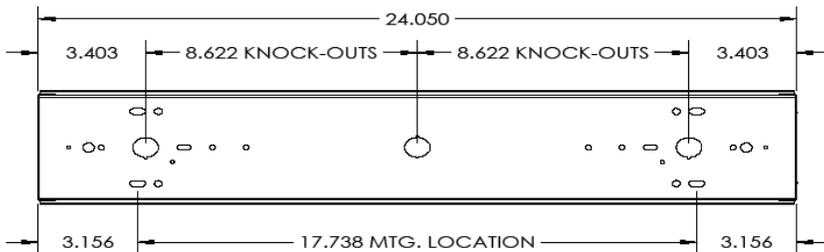

JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 1FSF 24 LED 24 DMV MW 40 W30

LED

1. SERIES	2. LENGTH	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. LENS	7. COLOR TEMP	
1FSF	24 24" long	LED	24 in.		DMV 120-277V Multivolt 0-10V Dimmable	MW Matte White Lens ¹	30 3000K
	48 48" long		15 15 Watts 2500 Lumens	35 3500K			
	96 96" long		20 20 Watts 3250 Lumens	40 4000K			
			25 25 Watts 4000 Lumens	50 5000K			
			33 33 Watts 5200 Lumens				
			48 in.				
			15 15 Watts 2500 Lumens				
			20 20 Watts 3400 Lumens				
			25 25 Watts 4250 Lumens				
			30 30 Watts 5200 Lumens				
			35 35 Watts 5900 Lumens				
			40 40 Watts 6650 Lumens				
			45 45 Watts 7400 Lumens				
			50 50 Watts 8150 Lumens				
			54 54 Watts 8550 Lumens				
			96 in.				
			30 30 Watts 5000 Lumens				
			40 40 Watts 6800 Lumens				
			50 50 Watts 8450 Lumens				
			60 60 Watts 10350 Lumens				
			70 70 Watts 11700 Lumens				
			80 80 Watts 13300 Lumens				
			90 90 Watts 14800 Lumens				
			100 100 Watts 16300 Lumens				
	108 108 Watts 17100 Lumens						

8. REFLECTOR	9. REFLECTOR TYPE	11. EM (O) ²	12. SENSOR (O) ²	13. PLUG IN OPTIONS (O) ²	14. CORD (O) ²
W30 White Symmetrical Reflector	Blank Solid Reflector	EM 14Watt Emergency	OS Occupancy Sensor	PI1 3 wire harness, including white, black, and green PI3D 5 wire harness, including white, black, green, and blue for emergency battery backup	CS 6' cord 18/3 WP 6' whip 3 wire MC

Notes:

¹Matte white lens and Frosted Lens ~ 10% light loss
²(O) is Optional

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.