

**JOB NAME:**
**CAT#:**
**TYPE:**

## APPLICATIONS

Premium quality low profile surface troffer with an almost limitless range of applications. Ideal for all commercial and industrial buildings requiring general illumination with surface configurations.

Housing is die-formed and embossed from cold rolled steel. Wiring access plate and knockouts are provided on back of housing allowing for flexible greenfield attachment. Driver cover snaps easily into place eliminating the need for tools when accessing the driver. Prismatic lens is held within a hinged steel frame door. The heavy gauge door frame hinges downward on either side and is held in the closed position by two positive cam latches. Knockouts are provided on ends for continuous wiring. Listed by and bears ETL label.



## FEATURES & BENEFITS

- 0-10V Dimming Driver standard
- Corrosion and scratch resistant
- Smooth edges for easy handling
- Ends are secured by snap-in interlocking system
- Clear .100 acrylic prismatic lens is standard
- Exclusive "Light Lock" frame reduces light leaks
- Flush steel door with rotary action cam latches and hinges from either side
- Easy access plate for quick wiring
- Equipped with Integral Earthquake Clips
- cETL<sub>US</sub> listed for damp location



## DIMENSIONS

**1x4:** 48"L x 11.92"W x 4.5"H


**2x2:** 24"L x 23.95"W x 4.5"H

**2x4:** 48"L x 23.95"W x 4.5"H


**2x2**

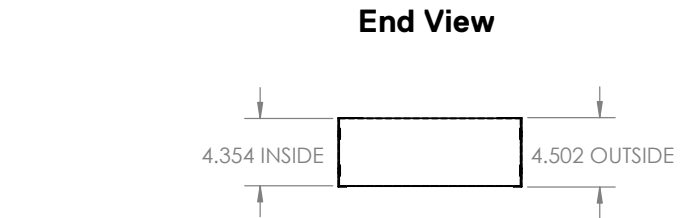

**1x4**

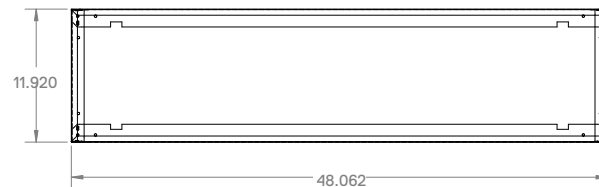

**2x4**

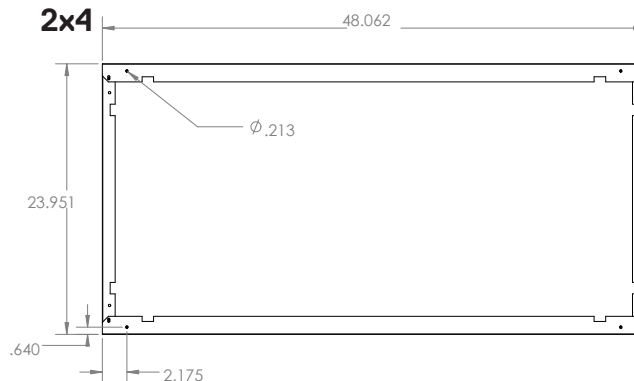

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: SRG 14 LED 22 DMV 30 EM G1

SRG		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. LENS		7. COLOR TEMP	
<b>SRG</b>	<b>14</b> 1x4 <b>22</b> 2x2 <b>24</b> 2x4	<b>LED</b>	<b>Standard 1x4</b>		<b>DMV</b> 120-277V Multivolt 0-10V Dimmable	<b>Blank</b> A12 .100 thick lens <b>125</b> A12 .125 thick lens <b>156</b> A19 .156 thick lens <b>CL</b> Clear .100 thick lens <b>CL125</b> Clear .125 thick lens <b>SW</b> Smooth White .100 thick lens <b>DD</b> Drop Dish Lens <b>A78</b> 78 Cell (2x4) or 36 Cell <b>NL</b> No Lens <b>NFL</b> No Frame and Lens (2x2)	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K			
			<b>Standard 2x2</b>		<b>SDMV</b> Step dimming Multivolt <b>D347V</b> 347VAC 0-10V Dimming <b>D120</b> Triac Dimming 120VAC <b>D277</b> Triac Dimming 277VAC					
			<b>Standard 2x4</b>							
			15	15 Watts 2150 Lumens						
			25	25 Watts 3580 Lumens						
			30	30 Watts 4300 Lumens						
			35	35 Watts 5000 Lumens						
			45	45 Watts 6400 Lumens						
			54	54 Watts 7700 Lumens						
			15	15 Watts 2150 Lumens						
			20	20 Watts 2860 Lumens						
			25	25 Watts 3600 Lumens						
			33	33 Watts 4700 Lumens						
			20	20 Watts 3200 Lumens						
			25	25 Watts 4000 Lumens						
			30	30 Watts 4800 Lumens						
			35	35 Watts 5600 Lumens						
			40	40 Watts 6400 Lumens						
			45	45 Watts 7200 Lumens						
			54	54 Watts 8670 Lumens						

**8. EMERGENCY (O)'**

<b>EM</b>	10W ~1200 Lumen Battery backup
<b>EM5</b>	5W ~600 Lumen Battery backup

**9. GASKETING (O)'**

<b>G1</b>	Single Gasketing
<b>G2</b>	Double Gasketing
<b>G3</b>	Triple Gasketing

Consult factory for options

**Notes:**

'(O) is optional

Dimensions and specifications subject to change without notice.

