



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The linear 2.5"x3.5" LED Linear fixture is for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. The 2.5"x3.5" Series fixtures can be installed individually or in group patterns. Die-formed and welded 22-gauge cold rolled steel. Removable end plates allow continuous wireway mounting.



FEATURES & BENEFITS

- Fixtures can be surface mounted, recessed mounted or pendant hung by stem or cable
- Accepts various lenses or louvers
- 8' units have a steel mullion to join two individual diffusers
- Optional welded light-leak flanges are available on ends
- Option to continuous row mount is standard by removing end plates
- Every fixture is individually tested
- Recessed versions are all IC Rated (L44R,L44RF,L44RR)
- _cETL_{US} listed for damp location

DIMENSIONS


P - Pendent

2ft. - 24"L x 2.375"W x 3.35"H

4ft. - 48"L x 2.375"W x 3.35"H

6ft. - 72"L x 2.375"W x 3.35"H

8ft. - 96"L x 2.375"W x 3.35"H

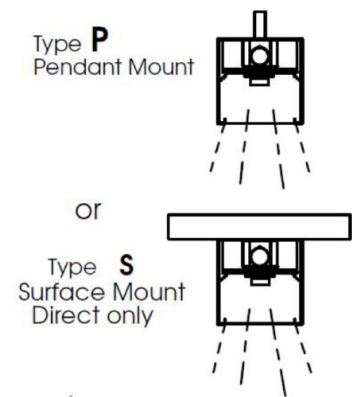



JOB NAME:


CAT#:

TYPE:


DIMENSIONS

P - Pendant Mount


4 ft. - Back View

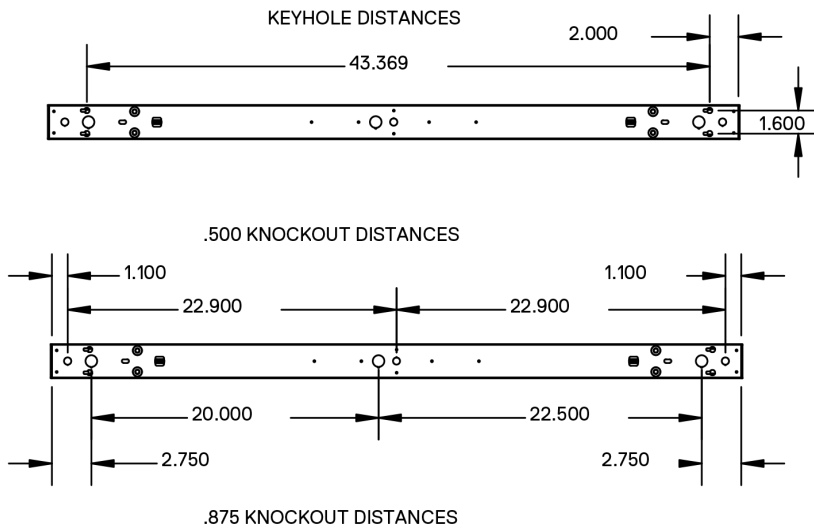

END VIEW

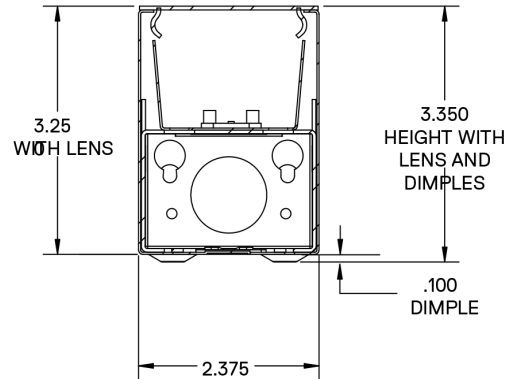

8 ft. - Back View

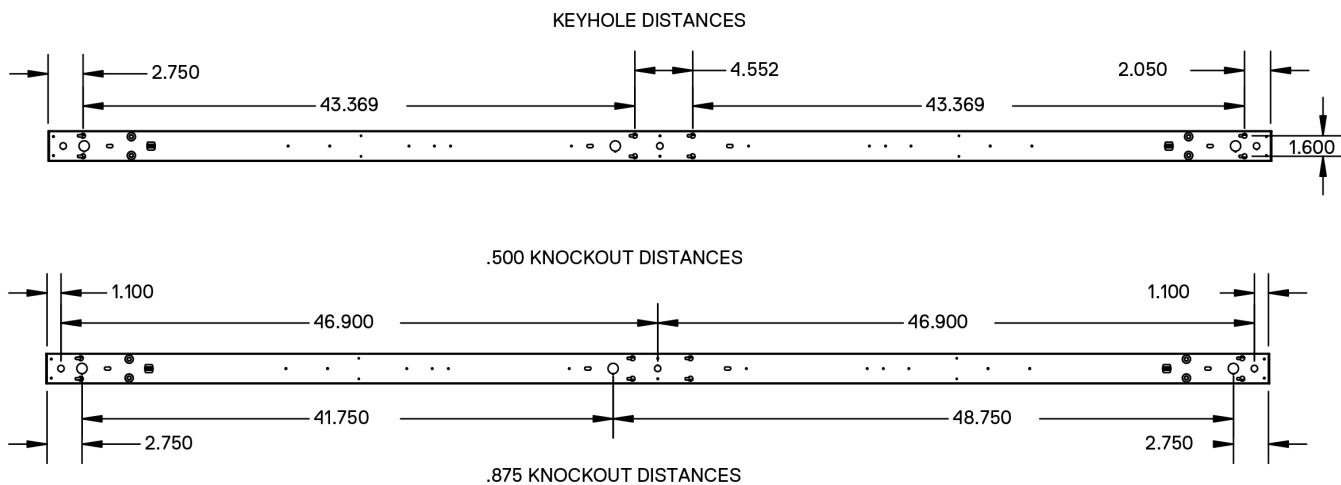



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: L44R 48 LED 24 DMV WH MW 30 EM SS H4W PI1

LED

1. SERIES	2. LENGTH	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. FINISH	7. LENS
L34S Surface Mount	24 24" long	LED	24 in. 13 13 Watts, 1300 Lumens 19 19 Watts, 1900 Lumens 23 23 Watts, 2300 Lumens	DMV 120-277V Multivolt Dimmable	WH Matte White SL Silver BK Matte Black	SF Snap-in Frosted Lens -85% Transmission
L34P Pendant Mount	48 48" long		48 in. 26 26 Watts, 2600 Lumens 38 38 Watts, 3800 Lumens 45 45 Watts, 4500 Lumens	SDMV Step dimming Multivolt LUT Lutron Driver1	BZ Bronze IN Iron	
	72 72" long		72 in. 39 39 Watts, 3900 Lumens 57 57 Watts, 5700 Lumens 69 69 Watts, 6900 Lumens			
	96 96" long		96 in. 52 52 Watts, 5200 Lumens 76 76 Watts, 7600 Lumens 90 90 Watts, 9000 Lumens			

8. COLOR TEMP	9. REFLECTOR	10. EM	11. SENSOR	12. HANGING KIT
30 3000K 35 3500K 40 4000K 50 5000K	BLANK Standard WW Wall Wash	EM14 Emergency Battery Pack 14W (integrated in fixtures 4' and longer)	SS Integral Occupancy Sensor SNS200 ALC Qualified	H4W Cable kit with 4 cable + power feed cable incl. w/ white canopy H4W5 Cable kit with 4' cable + power feed 0-10V dimming cable included w/ white canopy (5 wire) H4W6 Cable kit with 4' cable + power feed 0-10V dimming and EM cable incl. w/ white canopy (6 wire) (check local codes) H12W Cable kit w/ 12' cable + power feed cable incl.w/ white canopy H12W5 Cable kit w/ 12' cable + power feed 0-10V dimming. Cable included with white canopy (5 wire)

13. PLUG IN	14. CONFIGURATION
PI1 3 wire harness, including white, black and green PI2 4 wire harness, including white, black, green and blue for emergency backup PI3D 5 wire harness, including white, black, green, violet and gray	BLANK Individual -B Beginner Run -E Ender Run -J Joiner

Notes:

*See Lutron Chart for Driver & Controls Options

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

