



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Mobern's PMF area light is a highly efficient, long life, low profile wet location rated luminaire that provides uniform illumination that is perfect for auto dealerships, parking lots, walkways, roadways, campuses, facade lighting, grocery stores and other public areas.

FEATURES & BENEFITS

- One piece die-cast aluminum housing with outstanding corrosion protection
- UV resistant polycarbonate optical lens
- Round pole and square pole mounting, direct wall mounting, slip fitter
- Long lasting L70 ≥ 50,000 hrs
- IP66 rated
- Operated temperature range: -40°C to 45°C (-40°F to 113°F)
- Type III distribution standard
- cUL_{us} Wet Location listed

DIMENSIONS




15L Size: 100W/150W/200W




23L Size: 240W/300W/350W


Slipfitter Mount(100W/150W&200W)

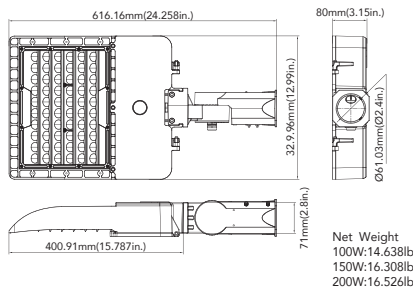


Pole Mount(100W/150W&200W)

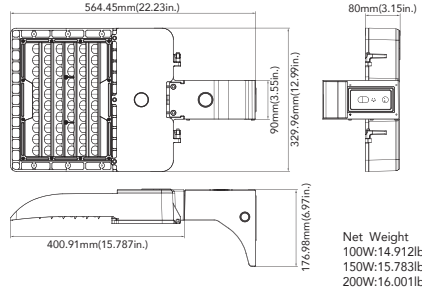


Wall Mount(100W/150W&200W)

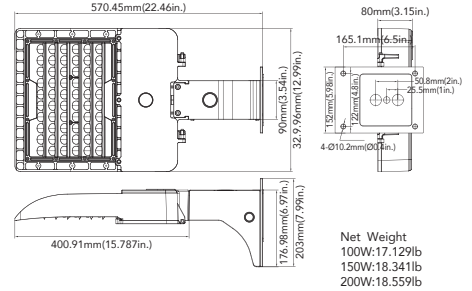


Slipfitter Mount(240W&300W&350W)

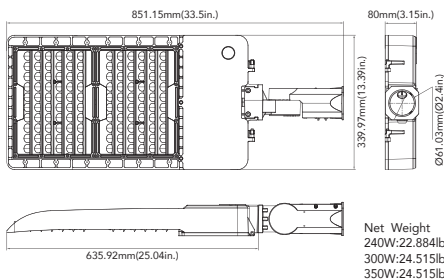

Pole Mount(240W&300W&350W)

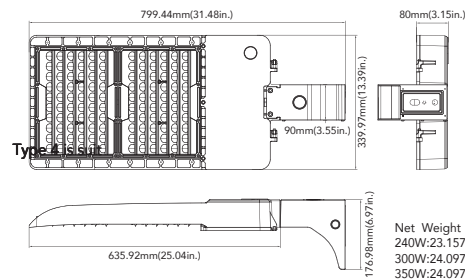

Wall Mount(240W&300W&350W)

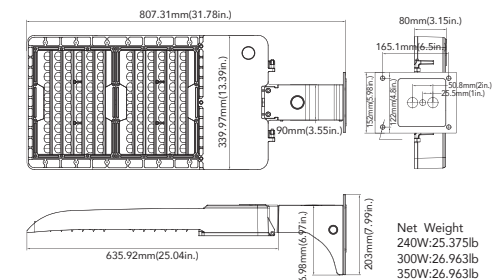

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:

TYPE:

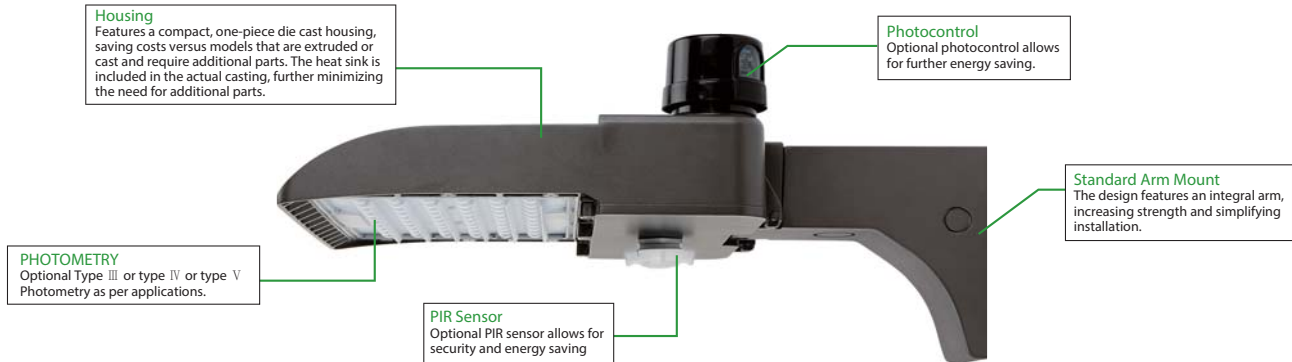

ORDERING

EXAMPLE: SAL SR 12 LED 150 DMV 40 OS PC

PMF		LED													
1. SERIES		2. SIZE		3. DISTRIBUTION		4. GEAR	5. WATTAGE/LUMENS*			6. DRIVER		7. FINISH		8. COLOR TEMP	
PMF Area Light	15	15.16"	Blank	Type 3	LED	15in Only			DMV	120-277V Multivolt 0-10V Dimmable	Blank	Bronze	40	4000K*	
	23	23.3"		T4		Type 4	100	100 Watts				14200 Lumens	50	5000K	
				T5		Type 5	150	150 Watts				21200 Lumens	SG	Silver/Gray	
						200	200 Watts	28000 Lumens	D480	347-480V	WH	White			
						23in Only									
				250		250 Watts	34000 Lumens								
				300		300 Watts	42500 Lumens								
				350		350 Watts	50000 Lumens								
9. SURGE PROTECTOR				10. PHOTOCELL				NOTES:							
SP		Surge Protection		P0		120V-277V Photocell		*Check with your local sales person for lead							
				P3		347V Photocell		time and distribution availability.							
				P4		480V Photocell									

ACCESSORIES

(Field Installed)

PMF-SQ-ARM	Square pole mounting arm for SAL (Bronze)
PMF-RD-ARM	Round pole mounting arm for SAL (Bronze)
PMF-SF	Slip fitter mounting for SAL (Bronze)
PMF-WALL-ARM	Wall mounting for SAL (Bronze)

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

MOUNTING

- Standard versatile mounting arm accommodates multiple drilling patterns as well as square and round poles
- Wall Mount available for direct wall mounting and J-box mounting
- Optional for cast aluminum slipfitter mounting adapter (Compatible with more MESTER mounting adaptors such as Tenon, suits for various application)

Mounting Options



Arm Mount (4" and 5" Square and Round poles)
Standard versatile mounting arm is simple to install and can be used with existing poles for retrofit installations.






Slipfitter Mount
An optional cast aluminum mast arm adapter secures fixture head to nominal 2-3/8" O.D. horizontal steel tenon arm.










Wall Mount
Wall Mount is easy to install for direct wall mounting with 1/2" conduit wiring or standard J-box mounting

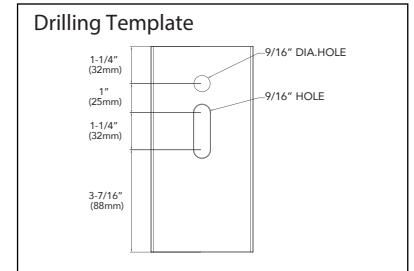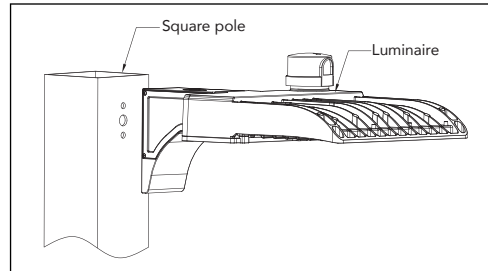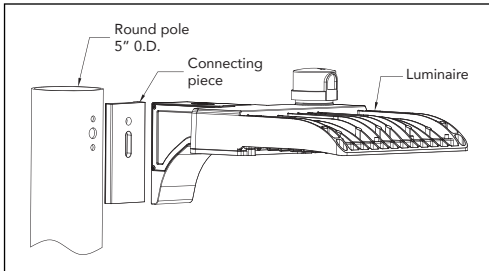Mounting Dimensions



EPA OF AREA LIGHT

Item							
	1	2 @90°	2 @120°	2@180°	3 @90°	3 @120°	4 @90°
150W/200W	0.4418	0.7145	0.8813	0.8836	1.0548	1.0135	1.0548
250W/300W/350W	0.5614	0.8471	1.105	1.1228	1.294	1.2503	1.294

Dimensions and specifications subject to change without notice.