



JOB NAME:

CAT#:

TYPE:

FEATURES & BENEFITS

- Wall or ceiling mount
- White powder coated aluminum base
- UL listed for wet locations
- Available in LED & incandescent

**Small
(FS112)**




**Medium
(FS113)**




DIMENSIONS

FS112

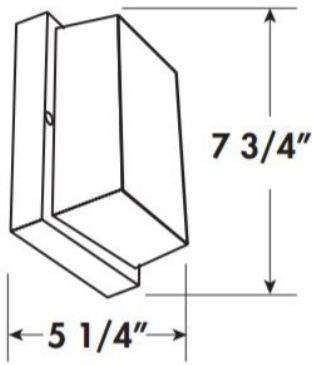

FS113

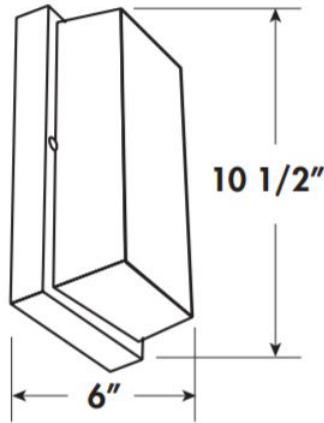

Extends: 4 1/2"
Height From
Center Mount: 5 1/4"

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: FS112 LE800 W W F

LE800

W

1. STYLE	2. LIGHT SOURCE	3. COLOR TEMP	4. BODY	5. DIFFUSER
FS112 Small Utility Light	LE800 13W Power Input, CRI 80 (TYP) >65 Lumens Per Watt, 120V	W 3000K C 4000K	W White	F Glare Reduced Frost Prismatic (Acrylic) C Clear (Acrylic) P Clear (Polycarbonate)
FS113 Medium Utility Light	Dimmable			

ORDERING (INCANDESCENT)

EXAMPLE: FS112 I40 W C LWE

I40

1. STYLE	2. LIGHT SOURCE	3. BODY	4. DIFFUSER	5. LAMPING (O)'
FS112 Small Utility Light	I40 1 X 40W Max	W White	F Glare Reduced Frost Prismatic (Acrylic) C Clear (Acrylic) P Clear (Polycarbonate)	LWE A19/E26, 3000K LCE A19/E26, 4000K
FS113 Medium Utility Light				

Dimensions and specifications subject to change without notice.

