



JOB NAME:

CAT#:


TYPE:

APPLICATIONS

Premium quality low profile troffer with an almost limitless range of applications. Ideal for all commercial and industrial buildings requiring general illumination with recessed configurations.

FEATURES & BENEFITS


- Min 80 CRI
- L70 life >60,000
- Corrosion and scratch resistant
- Smooth edges for easy handling
- Ends are secured by snap-in interlocking system
- Frosted lens is standard
- Exclusive "Light Lock" frame reduces light leaks
- Flush steel door with rotary action cam latches and hinges from either side
- Easy access plate for quick wiring
- Equipped with Integral Earthquake Clips
- ETL listed for damp location

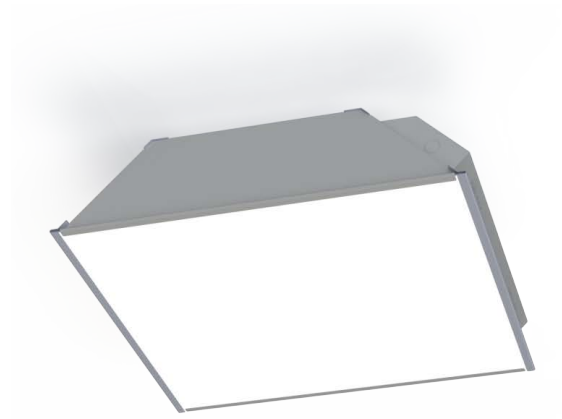

SPECIFICATIONS

Housing is die-formed and embossed from 18 gauge high grade aluminum. A vented driver cover box on the back side of the fixture allows easy access to wiring and electronics.

DIMENSIONS

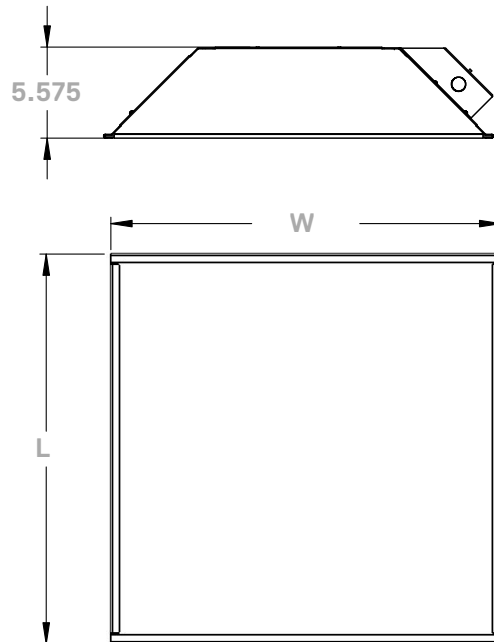

SIZE	W	L
22 (24 X 24)	23.875 in.	23.875 in.
24 (24 X 48)	23.875 in.	47.875 in.

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: FHBG 22 LED 80 DMV FR 40K EM14

FHBG		LED									
1. SERIES	2. LENGTH	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. LENS						
FHBG	22 2x2	LED	<u>Standard 2x2</u>	DMV 120-277V Multivolt 0-10V Dimmable	FR High Optic Frosted						
	24 2x4		80 80 Watts 11400 Lumens								
			100 100 Watts 14250 Lumens								
			142 142 Watts 20200 Lumens								
			168 168 Watts 26000 Lumens								
				<u>Standard 2x4</u>		SDMV Step Dimming Multivolt					
			168 168 Watts 25000 Lumens								
			190 190 Watts 29000 Lumens								
			238 238 Watts 36000 Lumens								
			300 300 Watts 42750 Lumens								
7. COLOR TEMP	8. EM (O) ¹	9. WIREGUARD (O) ¹									
30 3000K	EM14 12W Battery Backup	WG Wraparound Wireguard									
35 3500K											
40 4000K	EM20 20W Battery Backup										
50 5000K											

NOTES:

¹ O is optional

Dimensions and specifications subject to change without notice.