



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

A linear 2x3 fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas, 2x3 Series fixtures can be installed individually or in a continuous run. Specifically designed for direct/indirect lighting with snap-in lens to hide the LED arrays. Ideal where downlight and uplight are required.

FEATURES & BENEFITS


- Available in custom finishes (consult factory)
- Fixtures can be surface mounted to the wall or ceiling or pendant hung by engineered hanging kit
- $cETL_{US}$ listed for damp locations up to 90 watts
- $L_{70} > 50000$ hrs.
- Min CRI 80
- PL3D comes standard (fixture to fixture wiring options for power and dimming)
- 5 year warranty

DIMENSIONS


Part	L	W	H	X	Y
L23P24	24"	2"	3"	0.8"	1.55"
L23P48	48"	2"	3"	0.8"	1.55"
L23P72	72"	2"	3"	0.8"	1.55"
L23P96	96"	2"	3"	0.8"	1.55"

L = Length
W = Width
H = Height
X = Knock Out Distance
Y = Hanging Kit Distance



Wall Mount

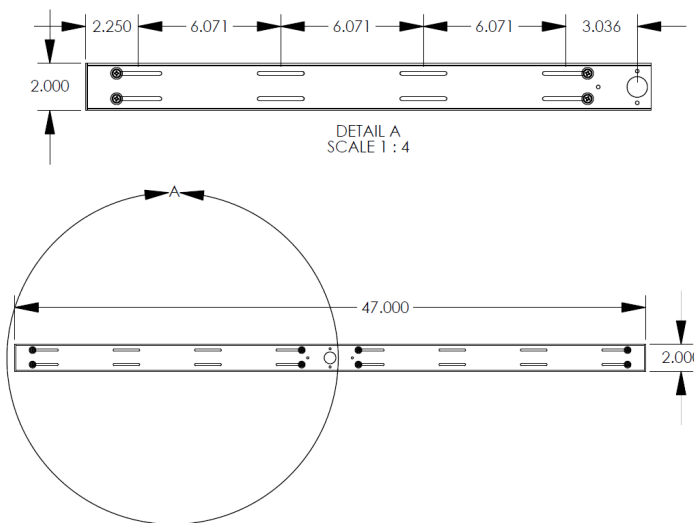


Pendant/Surface Mount

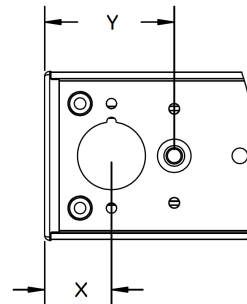

End Side View

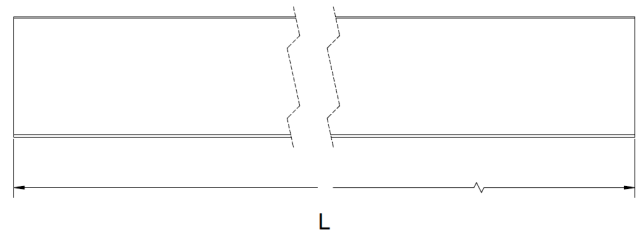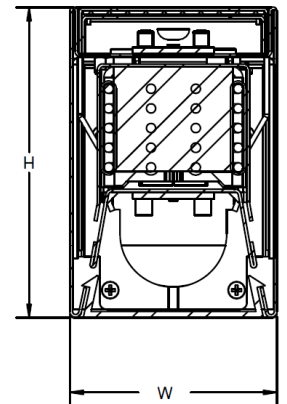

Dimensions and specifications subject to change without notice.

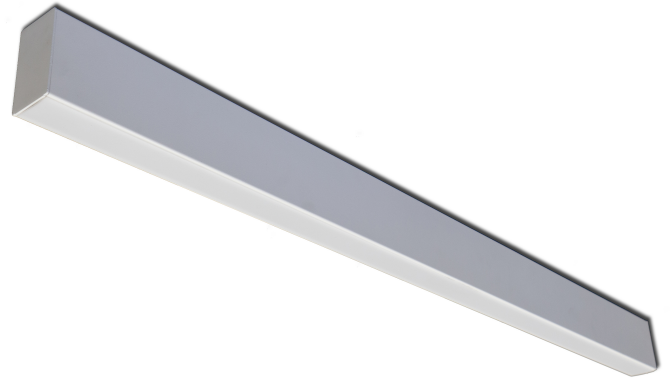



JOB NAME:

CAT#:

TYPE:

UP / DOWNLIGHT ONLY ORDERING

EXAMPLE: L23 W 24 LED 18 DMV BK SF 30 EM SS H6W5

LED

1. SERIES	2. MOUNTING	3. LENGTH	4. GEAR	5. LED MODULE DISTRIBUTION	6. WATTAGE/LUMENSs	7. DRIVER
L23	P Pendant	24 24"	LED	Blank Downlight (std.) U Uplight only	24 in.	DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming Multivolt D347V 347VAC 0-10V Dimming D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC
	S Surface ¹	48 48"			8 8 Watts, 900 Lumens 12 12 Watts, 1300 Lumens 18 18 Watts, 2000 Lumens 23 23 Watts, 2500 Lumens	
	W Wall	72 72" 96 96"			48 in. 16 16 Watts, 1800 Lumens 24 24 Watts, 2600 Lumens 36 36 Watts, 4000 Lumens 45 45 Watts, 5000 Lumens 72 in. 24 24 Watts, 2600 Lumens 36 36 Watts, 4000 Lumens 54 54 Watts, 5900 Lumens 68 68 Watts, 7500 Lumens 96 in. 32 32 Watts, 3500 Lumens 48 48 Watts, 5300 Lumens 72 72 Watts, 7900 Lumens 90 90 Watts, 10000 Lumens	

8. FINISH ²	9. LENS	10. COLOR TEMP	11. ACCESSORIES (O) ⁵	13. HANGING KIT (O) ⁵	14. CONFIGURATION
BK Black SI Silver WH White	SF Snap-in Frosted Acrylic Lens (85% transmission)	30 3000K 35 3500K 40 4000K 50 5000K	EM Emergency Battery Backup ³ SS Integral Occupancy Sensor	H6W5 HC606 cable kit with 6' cable & 5 wire power feed/cable incl. & white canopy ⁴ H12W5 HC612 cable kit with 12' cable & 5 wire power feed/cable incl. & white canopy ⁴ 2SCS24WH Two stem kits with 24" stem, canopy, and mounting	Blank Individual -B Beginner Run -E Ender Run -J Joiner Run

ACCESSORIES

A-HCPF606WH	Pendant mount 5 wire power feed canopy kit, 6' cable with white canopy
A-HCPF612WH	Pendant mount 5 wire power feed canopy kit, 12' cable with white canopy
A-HCNPF606WH	Pendant mount non-power canopy kit, 6' cable with white canopy
A-HCNPF612WH	Pendant mount non-power canopy kit, 12' cable with white canopy

Notes:

¹Downlight only

²Consult for custom finish options

³Consult for EM options. If not specified EM pack will be remote mounted

⁴Replace "W" with "B" for black canopy. Consult for more color options.

⁵(O) is optional

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

Cable Kit Includes:

1 - power feed kit w/ 6' or 12', 5 wire power cable w/ clear cord, white canopy, and mounting kit

1 - non-power feed kit w/ 6' or 12' non-powerfeed cable w/ clear cord, white canopy, and mounting kit





JOB NAME:

CAT#:

TYPE:

Up and Downlight ORDERING

EXAMPLE: L23 W 24 LED 18 DMV BK SF 30 EM SS H6W5

LED

1. SERIES	2. MOUNTING	3. LENGTH	4. GEAR	5. LED MODULE DISTRIBUTION	6. WATTAGE/LUMENS	7. DRIVER
L23	P Pendant S Surface ¹ W Wall	24 24" 48 48" 72 72" 96 96"	LED	1U2D Uplight and Downlight	Uplight or Downlight 24 in. 18 18 Watts 2000 Lumens 27 27 Watts 3000 Lumens 35 35 Watts 3800 Lumens 48 in. 24 26 Watts 2700 Lumens 36 36 Watts 3900 Lumens 54 54 Watts 6000 Lumens 68 68 Watts 7500 Lumens 72 in. 36 36 Watts 3900 Lumens 54 54 Watts 6000 Lumens 81 81 Watts 8800 Lumens 102 102 Watts 11200 Lumens 96 in. 48 48 Watts 5300 Lumens 72 72 Watts 7900 Lumens 108 108 Watts 11900 Lumens 135 135 Watts 15000 Lumens	DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming Multivolt D347V 347VAC 0-10V Dimming D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC

8. FINISH ²	9. LENS	10. COLOR TEMP	11. ACCESSORIES (O) ⁵	13. HANGING KIT (O) ⁵	14. CONFIGURATION
BK Black SI Silver WH White	SF Snap-in Frosted Acrylic Lens (85% transmission)	30 3000K 35 3500K 40 4000K 50 5000K	EM Emergency Battery Backup ³ SS Integral Occupancy Sensor	H6W5 HC606 cable kit with 6' cable & 5 wire power feed/cable incl. & white canopy ⁴ H12W5 HC612 cable kit with 12' cable & 5 wire power feed/cable incl. & white canopy ⁴ 2SCS24WH Two stem kits with 24" stem, canopy, and mounting	Blank Individual -B Beginner Run -E Ender Run -J Joiner Run

ACCESSORIES

A-HCPF606WH	Pendant mount 5 wire power feed canopy kit, 6' cable with white canopy
A-HCPF612WH	Pendant mount 5 wire power feed canopy kit, 12' cable with white canopy
A-HCNPF606WH	Pendant mount non-power canopy kit, 6' cable with white canopy
A-HCNPF612WH	Pendant mount non-power canopy kit, 12' cable with white canopy

Notes:

¹Downlight only

²Consult for custom finish options

³Consult for EM options. If not specified EM pack will be remote mounted.

⁴Replace "W" with "B" for black canopy. Consult for more color options.

⁵(O) is optional

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

Cable Kit Includes:

1 - power feed kit w/ 6' or 12', 5 wire power cable w/ clear cord, white canopy, and mounting kit

1 - non-power feed kit w/ 6' or 12' non-powerfeed cable w/ clear cord, white canopy, and mounting kit

