



JOB NAME:

CAT#:


TYPE:

APPLICATIONS


The linear 4x4 LED Linear fixture is for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. The 4x4 Series fixtures can be installed individually or in group patterns. Die-formed and welded 22-gauge cold rolled steel. Removable end plates allow continuous wireway mounting.

FEATURES & BENEFITS

- Fixtures can be surface mounted, recessed mounted or pendant hung by stem or cable
- Accepts various lenses or louvers
- 8' units have a steel mullion to join two individual diffusers
- Optional welded light-leak flanges are available on ends
- Option to continuous row mount is standard by removing end plates
- Every fixture is individually tested
- Recessed versions are all IC Rated (L44R,L44RF,L44RR)
- cETL_{us} listed for damp location

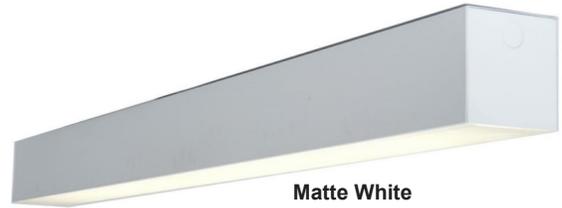

Matte White

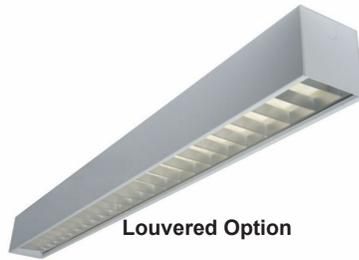



Louvered Option




No Reflector

DIMENSIONS

4FT Dimensions

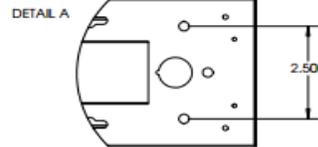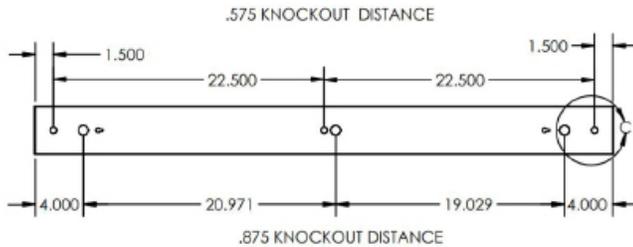


Type **P**
Pendant Mount



or


Type **S**
Surface Mount
Direct only



Type **WW**
Wall Wash



8FT Dimensions

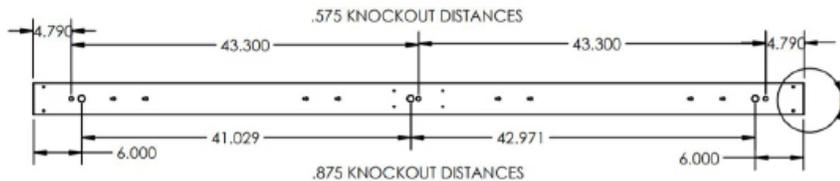




JOB NAME:

CAT#:




TYPE:

DIMENSIONS


Side View - Pendant Mount

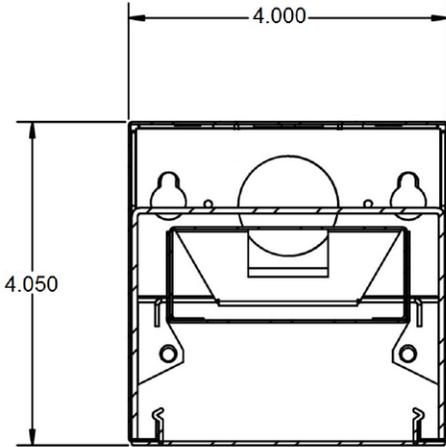


Side View - Wall Mount

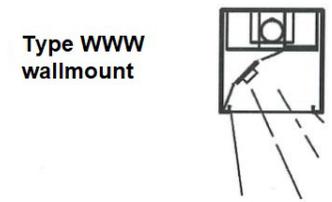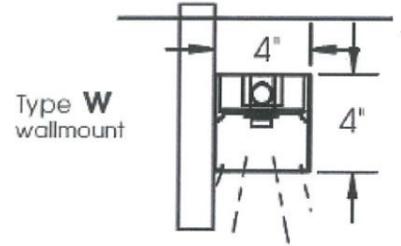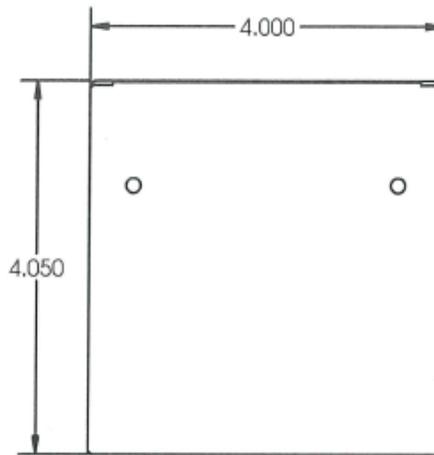

4FT Dimensions

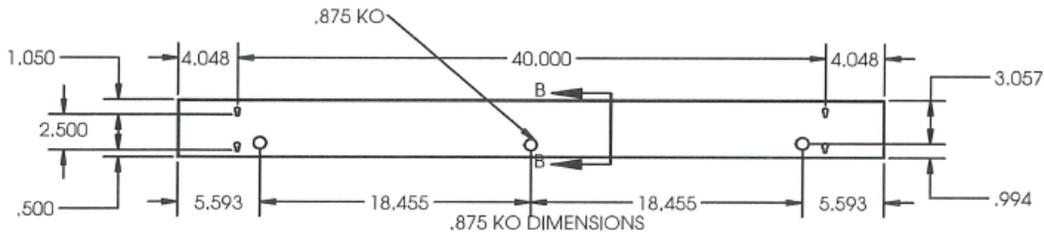

8FT Dimensions

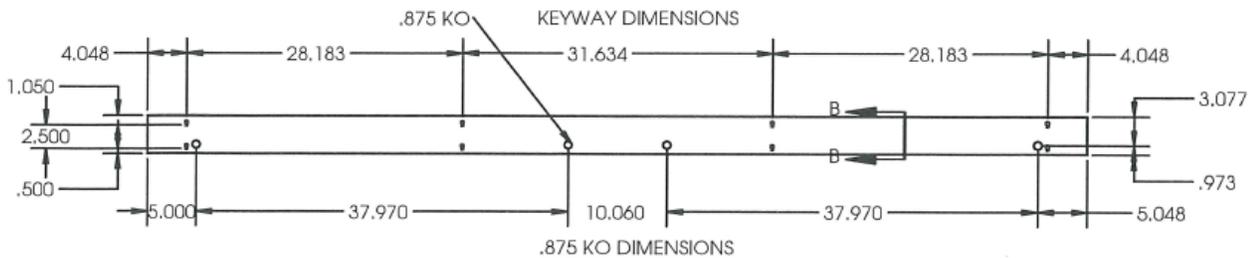




JOB NAME:

CAT#:

TYPE:

DIMENSIONS

Side View - Recessed

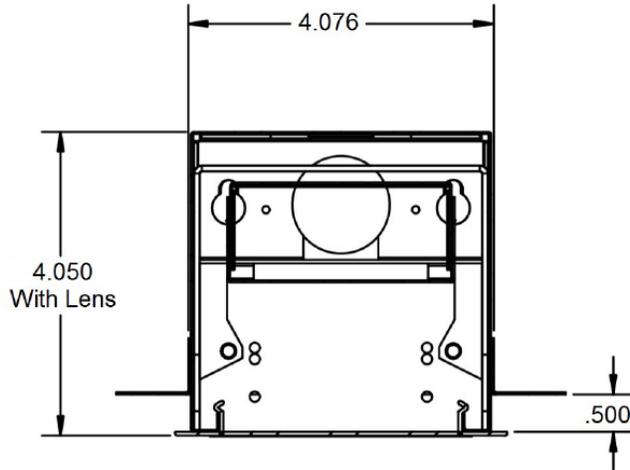


Flange Details

Type RR
Recess for Drywall/
Hard Ceiling
-RR (1/2 inch)
-RR650 (5/8 inch)
-RRxxx (custom depth)




Flangeless
Appearance

Type RF
Flush for Drywall



Flanged
Appearance

Type R
For 1" T-bar





Flangeless
Appearance

Type RWW/RFWW/RRWW
-Recess Wall Wash



Flanged/
Flangeless
Appearance

4FT-RR Dimensions

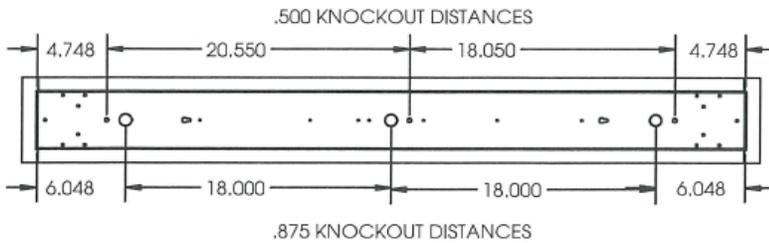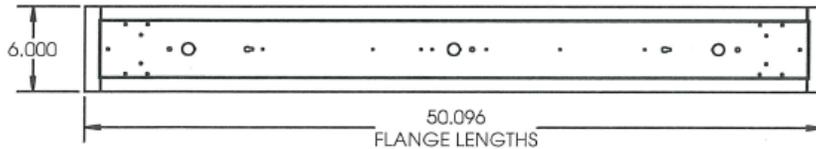



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: L44R 48 LED 24 DMV WH MW 30 EM SS H4W P11

LED

1. SERIES	2. LENGTH	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. FINISH	7. LENS	
L44R Recessed	24 24" long	LED	8 8 Watts, 1000 Lumens	DMV 120-277V Multivolt 0-10V Dimmable	WH Matte White	S.5 Specular Parabolic Louver (1/2"x1/2"x3/8")	
L44RF Recessed Flange			12 12 Watts, 1400 Lumens				
L44RR Recessed Flangeless Appearance			18 18 Watts, 2200 Lumens				
L44S Surface Mount	48 48" long		24 24 Watts, 2900 Lumens	SDMV Step dimming Multivolt	BK Matte Black	SF Snap-in Frosted Lens -85% Transmission	
L44W Wall Mount			16 16 Watts, 1900 Lumens				
L44P Pendant Mount			24 24 Watts, 2900 Lumens				
	72 72" long		36 36 Watts, 4300 Lumens	LUT Lutron Driver1	IN Iron	LV Baffled Louver	
			48 48 Watts, 5800 Lumens				
			72 72 Watts, 8600 Lumens				
			96 96" long				
							24 24 Watts, 2900 Lumens
							36 36 Watts, 4300 Lumens
		54 54 Watts, 6500 Lumens					
		72 72 Watts, 8600 Lumens					
		96 96 Watts, 111500 Lumens					

8. COLOR TEMP	9. REFLECTOR	10. EM	11. SENSOR	12. HANGING KIT
30 3000K	Blank Standard	EM14 Emergency Battery Pack 14W (integrated in fixtures 4' and longer)	SS Integral Occupancy Sensor	H4W Cable kit with 4 cable + power feed cable incl. w/ white canopy
35 3500K	WW Wall Wash		SNS200 ALC Qualified	H4W5 Cable kit with 4' cable + power feed 0-10V dimming cable included w/ white canopy (5 wire)
40 4000K				H4W6 Cable kit with 4' cable + power feed 0-10V dimming and EM cable incl. w/ white canopy (6 wire) (check local codes)
50 5000K				H12W Cable kit w/ 12' cable + power feed cable incl.w/ white canopy
				H12W5 Cable kit w/ 12' cable + power feed 0-10V dimming. Cable included with white canopy (5 wire)

13. PLUG IN
P11 3 wire harness, including white, black and green
P12 4 wire harness, including white, black, green and blue for emergency backup
P13D 5 wire harness, including white, black, green, violet and gray

14. CONFIGURATION
BLANK Individual
-B Beginner Run
-E Ender Run
-J Joiner

Notes:

*See Lutron Chart for Driver & Controls Options

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: L44R 48 LED 24 DMV WH MW 30 EM SS H4W PI1

LED

1. SERIES	2. LENGTH	3. GEAR	4. LED MODULE DISTRIBUTION	5. WATTAGE/LUMENS
L44W Wall Mount	24 24" long	LED	Blank Downlight (std.)	18 18 Watts, 2100 Lumens
			1U2D Uplight and Downlight	27 27 Watts, 3300 Lumens
L44P Pendant Mount	48 48" long			36 36 Watts, 4300 Lumens
				24 24 Watts, 2900 Lumens
				36 36 Watts, 4300 Lumens
				54 54 Watts, 6500 Lumens
	72 72" long			72 72 Watts, 8700 Lumens
				36 36 Watts, 4300 Lumens
				54 54 Watts, 6500 Lumens
				72 72 Watts, 8700 Lumens
	96 96" long			96 96 Watts, 12400 Lumens
				48 48 Watts, 5700 Lumens
				72 72 Watts, 8700 Lumens
				108 108 Watts, 12400 Lumens
				144 144 Watts, 17300 Lumens

6. DRIVER	7. FINISH	8. LENS	9. COLOR TEMP	10. REFLECTOR	11. EM
DMV 120-277V Multivolt 0-10V Dimmable	WH Matte White	S.5 Parabolic Louver (1/2"x1/2"x3/8")	30 3000K	Blank Standard	EM14 Emergency Battery Pack 14W (integrated in fixtures 4' and longer)
SDMV Step dimming Multivolt	SL Silver				
LUT¹ Lutron Driver	BK Matte Black	SF Snap-in Frosted Lens -85% Transmission	40 4000K		
			BZ Bronze	50 5000K	
	IN Iron	LV Baffled Louver			

12. SENSOR	13. HANGING KIT	14. PLUG IN	15. CONFIGURATION
SS Integral Occupancy Sensor	H4W Cable kit with 4 cable + power feed cable incl. w/ white canopy	PI1 3 wire harness, including white, black and green	BLANK Individual
SNS200 ALC Qualified	H4W5 Cable kit with 4' cable + power feed 0-10V dimming cable included w/ white canopy (5 wire)	PI2 4 wire harness, including white, black, green and blue for emergency backup	-B Beginner Run
	H4W6 Cable kit with 4' cable + power feed 0-10V dimming and EM cable incl. w/ white canopy (6 wire) (check local codes)	PI3D 5 wire harness, including white, black, green, violet and gray	-E Ender Run
	H12W Cable kit w/ 12' cable + power feed cable incl.w/ white canopy		-J Joiner
	H12W5 Cable kit w/ 12' cable + power feed 0-10V dimming. Cable included with white canopy (5 wire)		

Notes:

- ¹ See Lutron Chart for Driver & Controls Options.
- ² MW lens on the 8' fixture requires a center support bracket to hold it in place.

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.




JOB NAME:

CAT#:

TYPE:

L44 JOINER BOX


The L44 joiner box provides a sleek and modern solution for joining multiple linear fixtures to produce a visually appealing and continuous run. Easily create custom runs featuring 90° turns as well as “X” and “T” patterns. The joiner box is available in the same colors as the linear fixtures for the perfect match and finish.

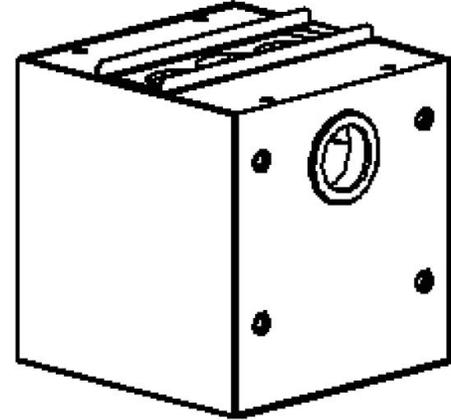

FEATURES AND BENEFITS

- Joiner box can be pendant hung by stem or cable
- Available in 1 way, 2 way, 3 way, and 4 way options
- Seamless design that is both fashionable and functional
- Formed and welded 22-gauge cold rolled steel
- Internal press in nuts creates ease in joining assembly
- Grommeted wire ways protect wiring

DIMENSIONS

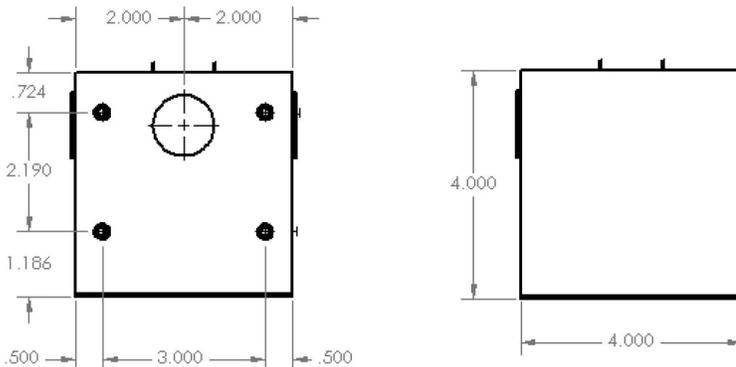

ORDERING

EXAMPLE: L44_JB -1WAY P WH A-HC301WH

1. SERIES	2. CONFIGURATION	3. HK	4. FINISH	5. OPTIONS
L44_JB	-1WAY -2WAY 90° -2WAY 180° -3WAY -4WAY	P Power NP Non-Power	WH White BK Black SL Silver IN Iron BZ Bronze	A-HC301WH Cable kit with 4' cable + power feed cable included with white canopy A-HC301WH5W Cable kit with 4' cable + power feed 0-10Vdimming cable included with white canopy (5 wire) A-HC302WH Cable kit with 12' cable + power feed cable included with white canopy A-HC3025WHW Cable kit with 12' cable + power feed 0-10Vdimming cable included with white canopy (5 wire)

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.