



JOB NAME:

CAT#:


TYPE:

APPLICATIONS



Now bring your exterior applications to life with a special designed wet location linear pendant. This aluminum extrusion is 3.5" wide for a bold yet minimal look with a sealed lens to keep out moisture and bugs.

FEATURES & BENEFITS

- Aluminum 6063, good heat radiation with long lifespan
- Waterproof IP66
- Anti-Collision LLevel IK10
- Support 0-10V, PWM and resistor dimming solution
- High lighting efficiency
- Long lifespan, >50,000 hours
- Light sources adopts LM-80 certified LED
- Adopt UL Class P certified power supply

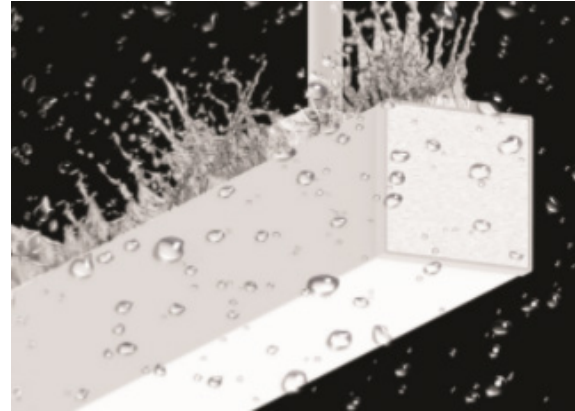

DIMENSIONS

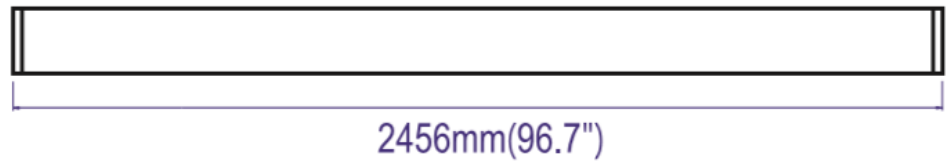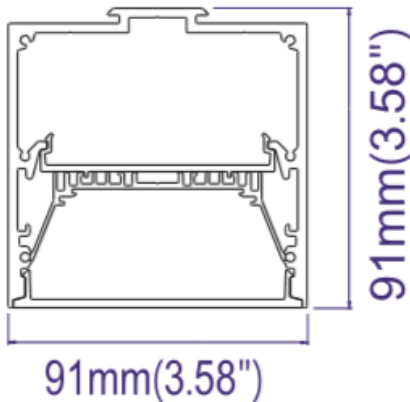

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: AIOCSW-48LED45DMVSA30

| AIOCSW | | LED | | | | | | | |
|-----------|---------|---------|-------------------------|--|-----------|---------------|--|--|--|
| 1. SERIES | 2. SIZE | 3. GEAR | 4. WATTAGE/LUMENS | 5. DRIVER | 6. FINISH | 8. COLOR TEMP | | | |
| AIOCSW | 48 48" | LED | <u>48"</u> | DMV 0-10V Dimming 120-277VAC Multivolt | SA Silver | 30 3000k | | | |
| | 96 96" | | 45 45 Watts 4900 Lumens | | | 40 4000K | | | |
| | | | 90 90 Watts 9800 Lumens | | | 50 5000K | | | |

ACCESSORIES

- AIOCSURF¹** Surface Mount Screw and Toggle Set of 3 (Includes 24 Inch Power Cord)
- A-HCPF606WH5W²** Pendant Mounting Power Feed Canopy Kit 5 Wire For Up To 6' Drop
- A-HCPF612WH5W²** Pendant Mounting Power Feed Canopy Kit 5 Wire For Up To 12' Drop
- A-HCNPF606WH** Pendant Mounting Non-Power Canopy Kit, 6' Cable With Canopy
- A-HCNPF612WH** Pendant Mounting Non-Power Canopy Kit 12' Cable With Canopy

¹Included with channels only need to purchase for replacements
²Use one power feed canopy kit for every power drop. Non-power feed version is ordered separately for mounting where no power feed is required

Lumens are subject to a tolerance of ±10% and not relevant to RGB
 Input wattage can vary depending on options
 Dimensions and specifications subject to change without notice.

Dimensions and specifications subject to change without notice.