



JOB NAME:

CAT#:


TYPE:

APPLICATIONS

Make a bold statement in your space with this dramatic geometric shape of light. Choose from two sizes of squares, 4 and 8 foot sides, in a 4 inch linear profile. Lit corners, shadowless LED lighting and energy efficient performance provides excellent general lighting. This distinctive architectural preconfigured fixture is ideal for circulation spaces, lobbies, retail and conference rooms. Available in two lumen packages and in a variety of finishes.

FEATURES & BENEFITS

- Lamp life rated at 50,000 hours
- 6 or 8 watts per foot; ~100 lumens per watt- Consult for other options
- 5 years warranty
- >80 CRI
- Surface mounted to ceiling or pendant hung by stem or cable

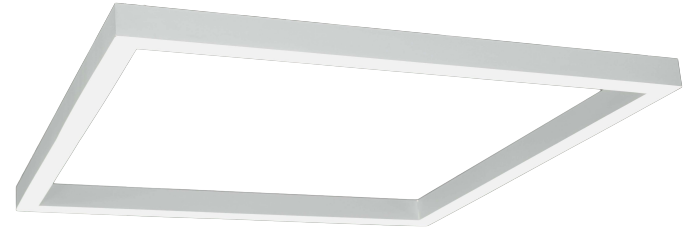

SPECIFICATIONS

Housing is die-formed and welded 22 gauge cold rolled steel. A 1/2" regressed flange at the bottom insures uniformity and rigidity. Fixtures can be surface mounted to the ceiling or pendant hung by stem or cable. Standard lens is a snap in frosted lens especially made for LED. Other lens options including a bladed louver are available. Fixture assembles and installs easily with 4 cable kits that connect at each corner. Down Light Only.

Size: W x L x H in inches

4x4: 48"W x 48"L x 4"H

8x8: 96"W x 96"L x 4"H

ORDERING

EXAMPLE: SQ44P 4X4 LED 128 DMV SL MW 40 H8W

SQ44		LED			
1. SERIES	2. SIZE	3. GEAR	4. LED DISTRIBUTION	5. WATTAGE/LUMENS	6. DRIVER
SQ44P Pendant Mount Only	4x4 48"W x 48"L x 4"H 8x8 96"W x 96"L x 4"H	LED	1U1D - 1/2 up, 1/2 down 1U2D - 1/3 up, 2/3 down 2U1D - 2/3 up, 1/3 down	4 x 4 96 96 Watts 9600 Lumens 128 128 Watts 12800 Lumens 8 x 8 192 192 Watts 19200 Lumens 256 256 Watts 25600 Lumens 12 x 12 108 108 Watts 10800 Lumens	DMV 120-277VAC 0-10V Dimmable
7. FINISH	8. LENS MATERIAL	9. COLOR TEMP	10. HANGING/POWER FEED KIT		
WH White BK Black SL Silver IN Iron RD Red BZ Bronze	SF Snap In Frosted Acrylic Lens MW Matte White Lens S.5 Specular Parabolic Louver PLA White Cubed Acrylic Louver LV Bladed Louver Semi Specular A Prismatic Acrylic #12 Pattern	30 3000K 35 3500K 40 4000K 50 5000K	H4W HC401 4ft. Cable kit with 3 wire power feed. White Canopy. H8W HC402 8ft. Cable kit with 3 wire power feed. White Canopy. H4W5 HC401 4ft. Cable kit with 5 wire power feed. White Canopy. H8W5 HC402 8ft. Cable kit with 5 wire power feed. White Canopy.		

NOTE: Custom length available. Consult factory for additional information

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: SQ44RF 4X4 LED 128 DMV SL MW 40 H8W

SQ44		LED				
1. SERIES		2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	
SQ44RF Recessed Mount Square Flanged for Existing Drywall Installation		4x4 48"W x 48"L x 4"H 8x8 96"W x 96"L x 4"H	LED	4 x 4 96 96 Watts 9600 Lumens 128 128 Watts 12800 Lumens 8 x 8 192 192 Watts 19200 Lumens 256 256 Watts 25600 Lumens 12 x 12 108 108 Watts 10800 Lumens	DMV 120-277VAC 0-10V Dimmable	
SQ44RR375 Recessed Mount Square Flanged for New Drywall Installation (3/8" Flange)						
SQ44RR500 Recessed Mount Square Flanged for New Drywall Installation (1/2" Flange)						
SQ44RR675 Recessed Mount Square Flanged for New Drywall Installation (5/8" Flange)						
6. FINISH		7. LENS MATERIAL		8. COLOR TEMP	9. HANGING/POWER FEED KIT	
WH White		SF Snap In Frosted Acrylic Lens		30 3000K	H4W HC401 4ft. Cable kit with 3 wire power feed. White Canopy.	
BK Black		MW Matte White Lens		35 3500K	H8W HC402 8ft. Cable kit with 3 wire power feed. White Canopy.	
SL Silver		S.5 Specular Parabolic Louver		40 4000K	H4W5 HC401 4ft. Cable kit with 5 wire power feed. White Canopy.	
IN Iron		PLA White Cubed Acrylic Louver		50 5000K	H8W5 HC402 8ft. Cable kit with 5 wire power feed. White Canopy.	
RD Red		LV Bladed Louver Semi Specular				
BZ Bronze		A Prismatic Acrylic #12 Pattern				

NOTE: Custom length available. Consult factory for additional information

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.






JOB NAME:


CAT#:

TYPE:

SQ44P4X4

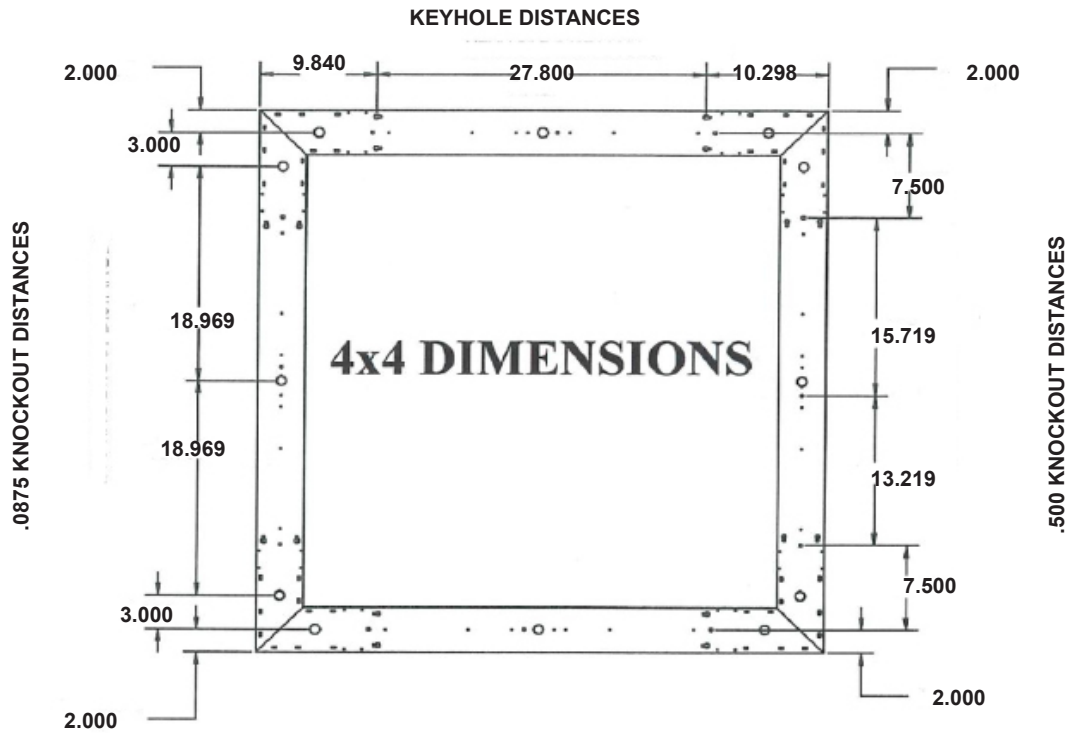

SQ44P8X8

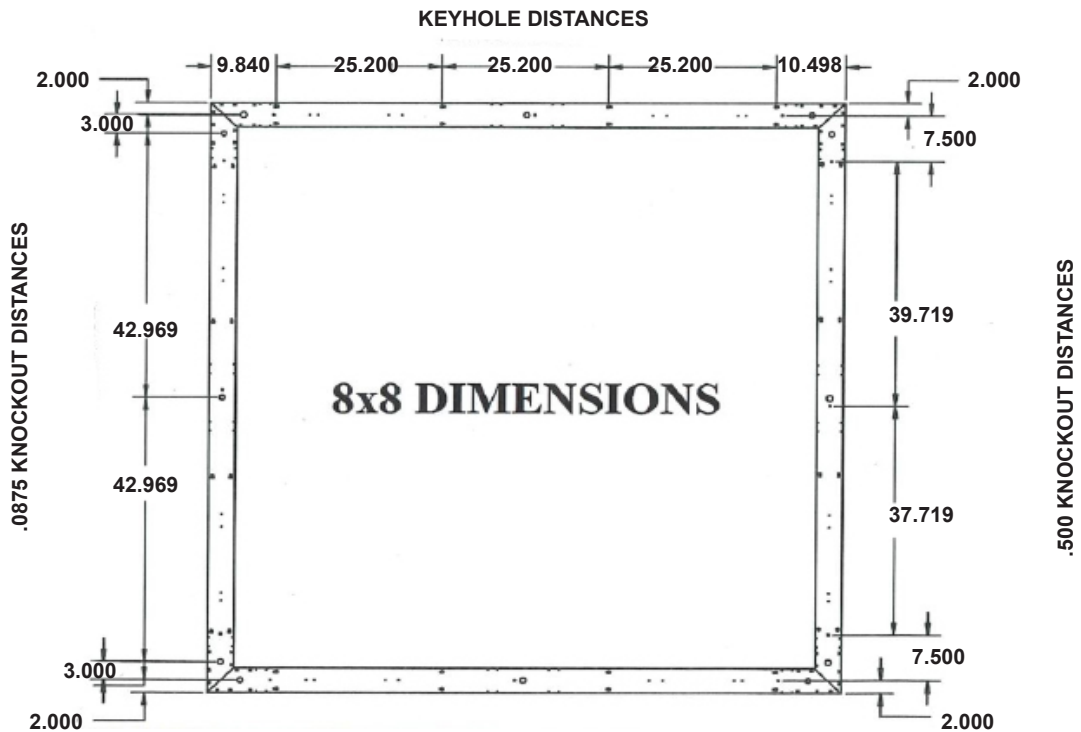




JOB NAME:


CAT#:

TYPE:

SQ44RF4X4

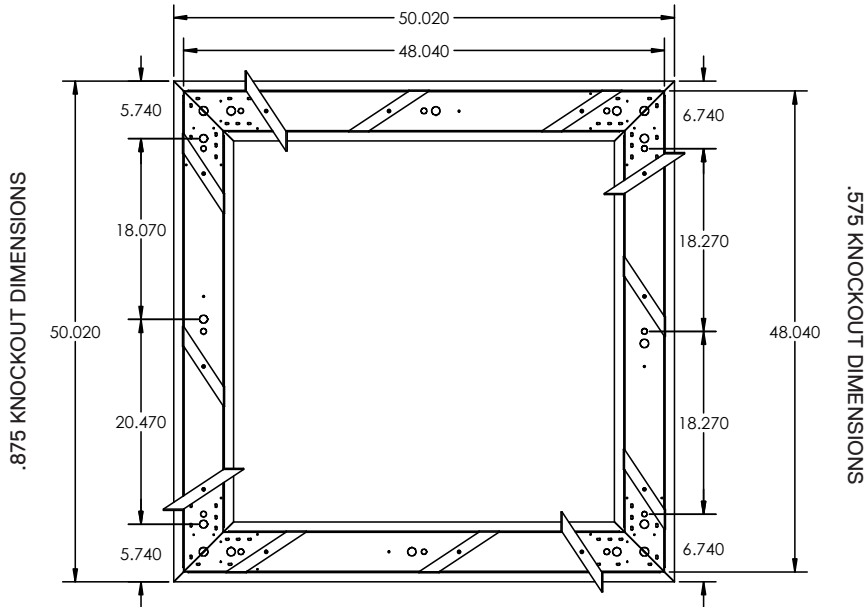

SQ44RF8X8

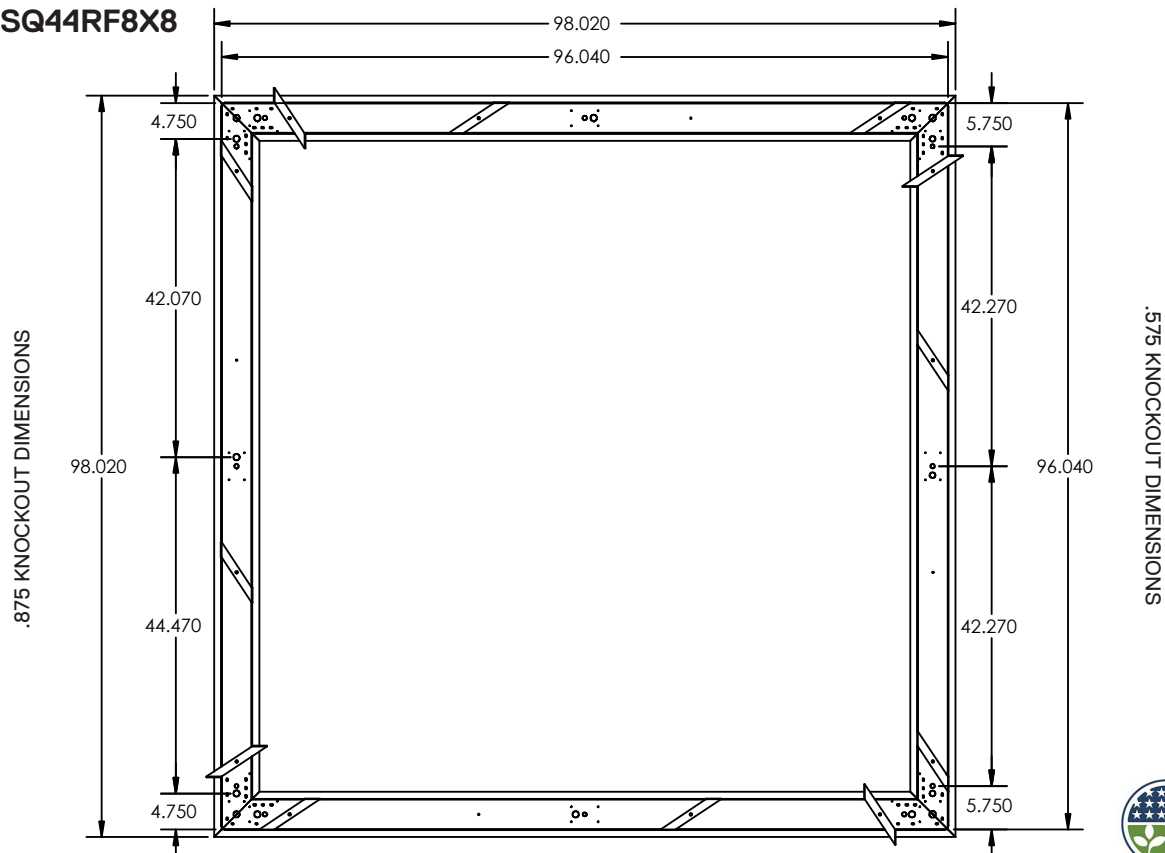




JOB NAME:

CAT#:

TYPE:

SQ44RR4X4

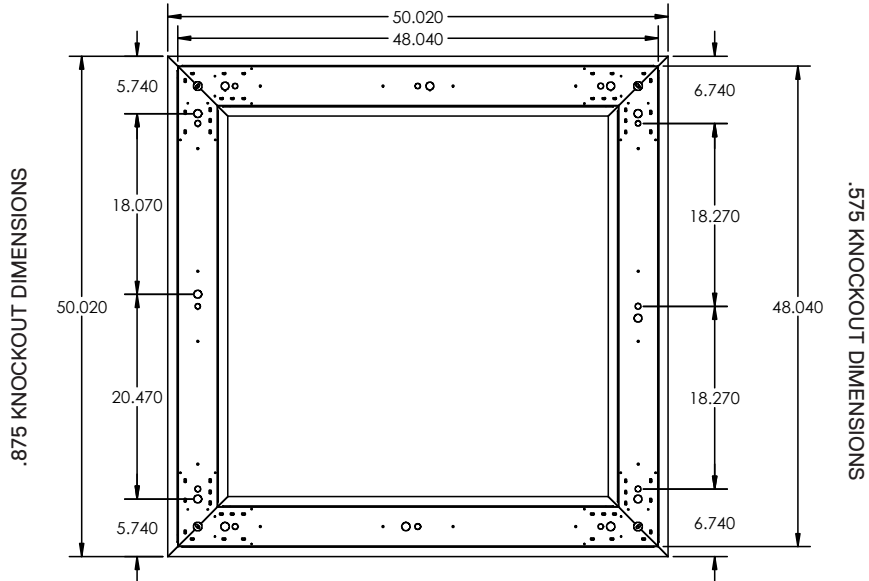

SQ44RR8X8

