


**JOB NAME:**
**CAT#:**
**TYPE:**

## APPLICATIONS

Make a bold statement in your space with this dramatic geometric shape of light. Choose from two sizes of squares, 4 and 8 foot sides, in a 4 inch linear profile. Lit corners, shadowless LED lighting and energy efficient performance provides excellent general lighting. This distinctive architectural preconfigured fixture is ideal for circulation spaces, lobbies, retail and conference rooms. Available in two lumen packages and in a variety of finishes.

## FEATURES & BENEFITS

- Lamp life rated at 50,000 hours
- 6 or 8 watts per foot; ~100 lumens per watt- Consult for other options
- 5 years warranty
- >80 CRI
- Surface mounted to ceiling or pendant hung by stem or cable

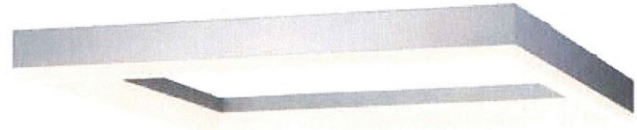

## SPECIFICATIONS

Housing is die-formed and welded 22 gauge cold rolled steel. A 1/2" regressed flange at the bottom insures uniformity and rigidity. Fixtures can be surface mounted to the ceiling or pendant hung by stem or cable. Standard lens is a snap in frosted lens especially made for LED. Other lens options including a bladed louver are available. Fixture assembles and installs easily with 4 cable kits that connect at each corner. Down Light Only.

**Size:** W x L x H in inches

**4x4:** 48"W x 48"L x 4"H

**8x8:** 96"W x 96"L x 4"H

## ORDERING

EXAMPLE: SQ44P 4X4 LED 128 DMV SL MW 40 H8W

SQ44		LED			
1. SERIES	2. SIZE	3. GEAR	4. LED DISTRIBUTION	5. WATTAGE/LUMENS	6. DRIVER
<b>SQ44P</b> Pendant Mount Only	<b>4x4</b> 48"W x 48"L x 4"H <b>8x8</b> 96"W x 96"L x 4"H	<b>LED</b>	<b>1U1D</b> - 1/2 up, 1/2 down <b>1U2D</b> - 1/3 up, 2/3 down <b>2U1D</b> - 2/3 up, 1/3 down	<b>4 x 4</b> <b>96</b> 96 Watts 9600 Lumens <b>128</b> 128 Watts 12800 Lumens <b>8 x 8</b> <b>192</b> 192 Watts 19200 Lumens <b>256</b> 256 Watts 25600 Lumens <b>12 x 12</b> <b>108</b> 108 Watts 10800 Lumens	<b>DMV</b> 120-277VAC 0-10V Dimmable
7. FINISH	8. LENS MATERIAL	9. COLOR TEMP	10. HANGING/POWER FEED KIT		
<b>WH</b> White <b>BK</b> Black <b>SL</b> Silver <b>IN</b> Iron <b>RD</b> Red <b>BZ</b> Bronze	<b>SF</b> Snap In Frosted Acrylic Lens <b>MW</b> Matte White Lens <b>S.5</b> Specular Parabolic Louver <b>PLA</b> White Cubed Acrylic Louver <b>LV</b> Bladed Louver Semi Specular <b>A</b> Prismatic Acrylic #12 Pattern	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K	<b>H4W</b> HC401 4ft. Cable kit with 3 wire power feed. White Canopy. <b>H8W</b> HC402 8ft. Cable kit with 3 wire power feed. White Canopy. <b>H4W5</b> HC401 4ft. Cable kit with 5 wire power feed. White Canopy. <b>H8W5</b> HC402 8ft. Cable kit with 5 wire power feed. White Canopy.		

NOTE: Custom length available. Consult factory for additional information

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: SQ44RF 4X4 LED 128 DMV SL MW 40 H8W

**SQ44**

**LED**

1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER
<b>SQ44RF</b> Recessed Mount Square Flanged for Existing Drywall Installation	<b>4x4</b> 48"W x 48"L x 4"H <b>8x8</b> 96"W x 96"L x 4"H	<b>LED</b>	<b>4 x 4</b> <b>96</b> 96 Watts 9600 Lumens <b>128</b> 128 Watts 12800 Lumens	<b>DMV</b> 120-277VAC 0-10V Dimmable
<b>SQ44RR375</b> Recessed Mount Square Flanged for New Drywall Installation (3/8" Flange)			<b>8 x 8</b> <b>192</b> 192 Watts 19200 Lumens <b>256</b> 256 Watts 25600 Lumens	
<b>SQ44RR500</b> Recessed Mount Square Flanged for New Drywall Installation (1/2" Flange)			<b>12 x 12</b> <b>108</b> 108 Watts 10800 Lumens	
<b>SQ44RR675</b> Recessed Mount Square Flanged for New Drywall Installation (5/8" Flange)				

6. FINISH	7. LENS MATERIAL	8. COLOR TEMP	9. HANGING/POWER FEED KIT
<b>WH</b> White	<b>SF</b> Snap In Frosted Acrylic Lens	<b>30</b> 3000K	<b>H4W</b> HC401 4ft. Cable kit with 3 wire power feed. White Canopy.
<b>BK</b> Black	<b>MW</b> Matte White Lens	<b>35</b> 3500K	<b>H8W</b> HC402 8ft. Cable kit with 3 wire power feed. White Canopy.
<b>SL</b> Silver	<b>S.5</b> Specular Parabolic Louver	<b>40</b> 4000K	<b>H4W5</b> HC401 4ft. Cable kit with 5 wire power feed. White Canopy.
<b>IN</b> Iron	<b>PLA</b> White Cubed Acrylic Louver	<b>50</b> 5000K	<b>H8W5</b> HC402 8ft. Cable kit with 5 wire power feed. White Canopy.
<b>RD</b> Red	<b>LV</b> Bladed Louver Semi Specular		
<b>BZ</b> Bronze	<b>A</b> Prismatic Acrylic #12 Pattern		

NOTE: Custom length available. Consult factory for additional information

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.






JOB NAME:

CAT#:

TYPE:


**SQ44P4X4**

**KEYHOLE DISTANCES**

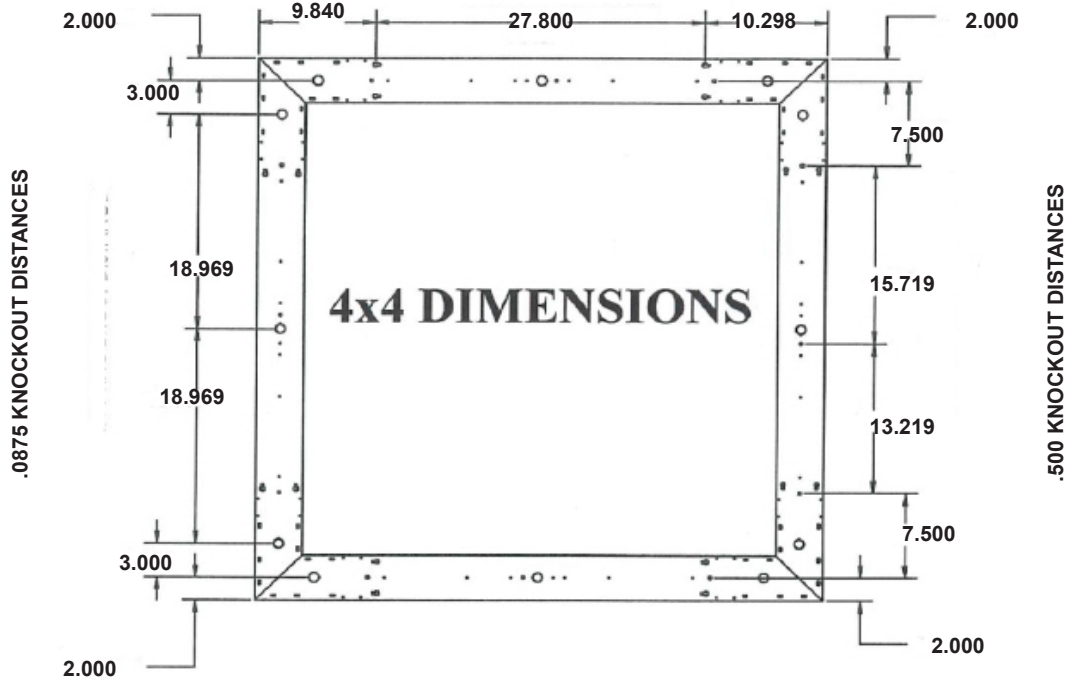

**SQ44P8X8**

**KEYHOLE DISTANCES**

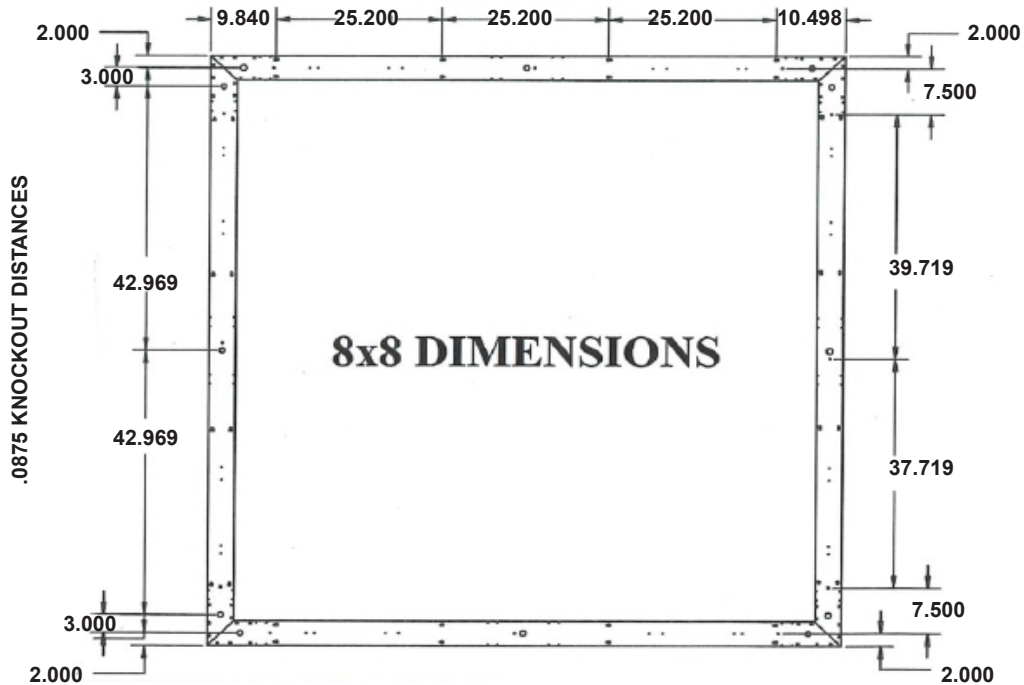




JOB NAME:


CAT#:

TYPE:

**SQ44RF4X4**

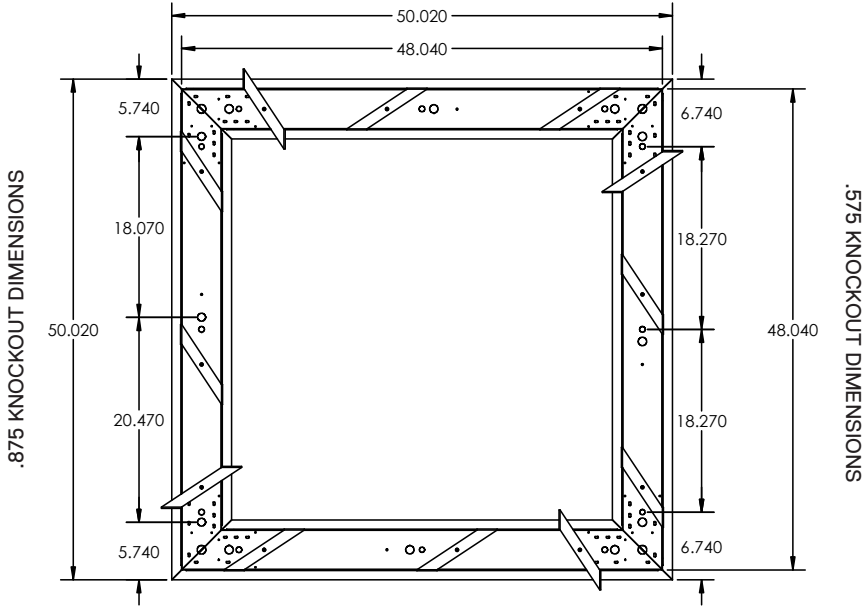

**SQ44RF8X8**

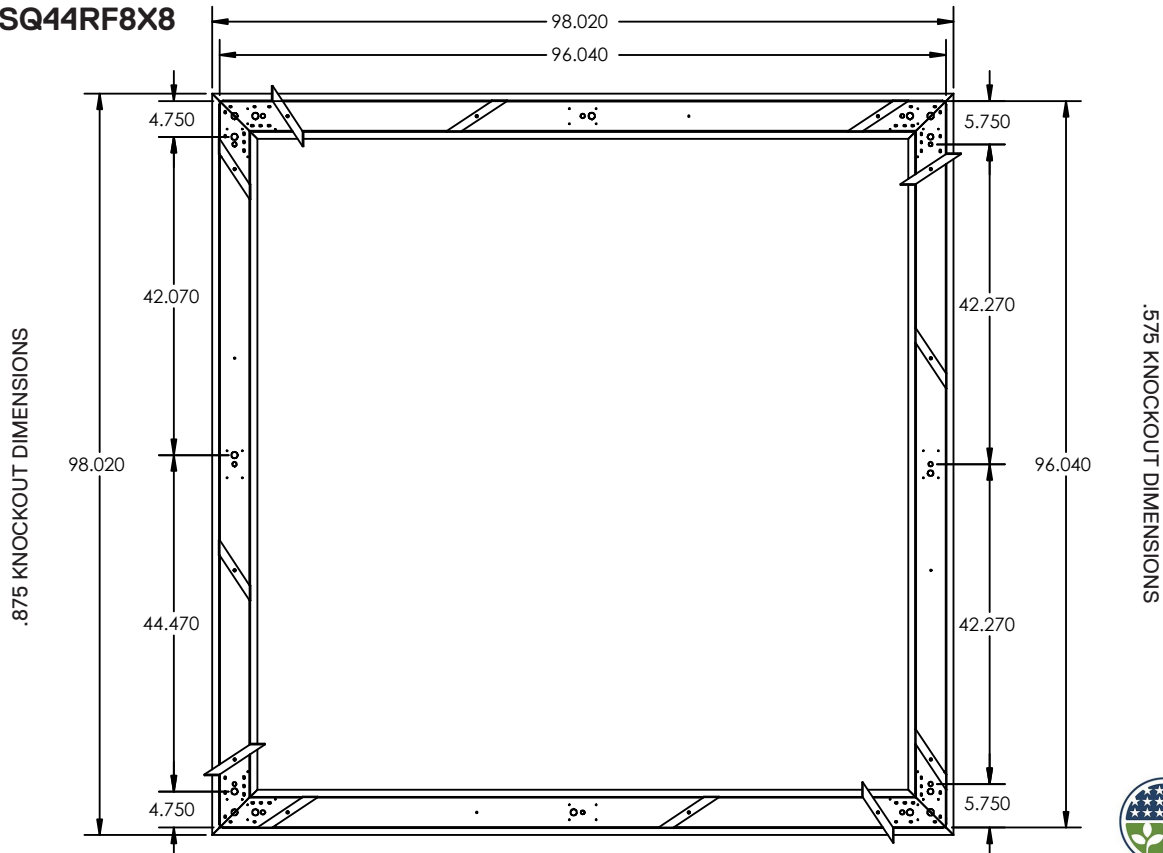




JOB NAME:

CAT#:

TYPE:

**SQ44RR4X4**

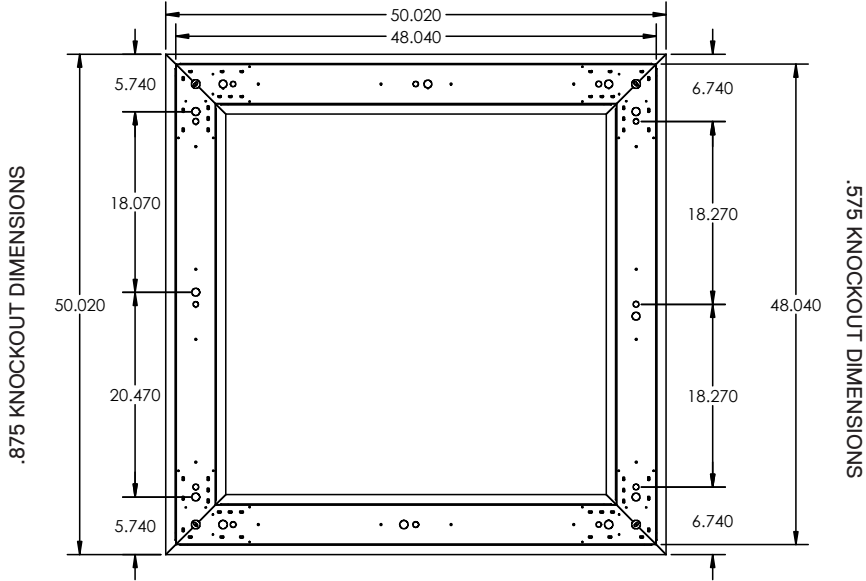

**SQ44RR8X8**

