


**JOB NAME:**
**CAT#:**
**TYPE:**

## APPLICATIONS

Make a bold statement in your space with this dramatic geometric shaped linear line of light. Specially designed for direct/indirect lighting with snap in lens to hide the lamps or LED arrays. Ideal where downlight and uplight are required. Choose from two sizes of squares, 4 and 8 foot sides, in a 4 inch width linear profile. Lit corners, shadowless LED lighting and energy efficient performance provides excellent general lighting. This distinctive architectural preconfigured fixture is ideal for circulation spaces, lobbies, retail and conference rooms. Available in two lumen packages and in a variety of finishes. Standard lens is a snap in frosted lens especially made for LED. Other lens options including a bladed louver are available. Fixture assembles and installs easily and quickly and mounts easily with 4 cable kits that connect at each corner.

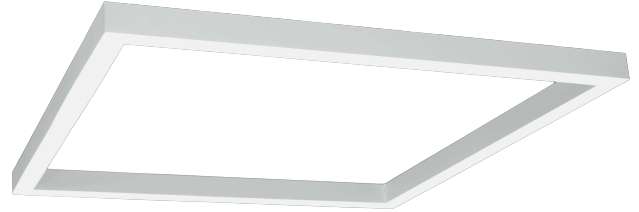

## FEATURES & BENEFITS

- Lamp life rated at 50,000 hours
- 6 or 8 watts per foot; ~100 lumens per watt- Consult for other options
- 5 years warranty
- >80 CRI
- Surface mounted to ceiling or pendant hung by stem or cable

**Size:** W x L x H in inches

**4x4:** 48"W x 48"L x 5"H

**8x8:** 96"W x 96"L x 5"H

## SPECIFICATIONS

Die-formed and welded 22-gauge cold rolled steel Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity. Uplight fixtures have 1/2" x 4" apertures along the top of the housing to provide approximately uniform ambient uplight for ceiling illumination.

## ORDERING

EXAMPLE: SQ45 4X4 LED 128 DMV SL MW 40 H8W

### SQ45

### LED

| 1. SERIES   | 2. SIZE   | 3. GEAR  | 4. LED DISTRIBUTION  | 5. WATTAGE/LUMENS  | 6. DRIVER                               |
|---|---|--|--|--|---|
| <b>SQ45P</b><br>Pendant Mount Only  | <b>4x4</b> 48"W x 48"L x 5"H<br><b>8x8</b> 96"W x 96"L x 5"H  | <b>LED</b>   | <b>1U1D</b> - 1/2 up, 1/2 down<br><b>1U2D</b> - 1/3 up, 2/3 down<br><b>2U1D</b> - 2/3 up, 1/3 down   | <b>4 x 4</b><br><b>96</b> 96 Watts 9600 Lumens<br><b>128</b> 128 Watts 12800 Lumens<br><b>8 x 8</b><br><b>192</b> 192 Watts 19200 Lumens<br><b>256</b> 256 Watts 25600 Lumens<br><b>12 x 12</b><br><b>108</b> 108 Watts 10800 Lumens | <b>DMV</b> 120-277VAC<br>0-10V Dimmable |
| 7. FINISH   | 8. LENS MATERIAL  | 9. COLOR TEMP  | 10. HANGING/POWER FEED KIT   |  |   |
| <b>WH</b> White<br><b>BK</b> Black<br><b>SL</b> Silver<br><b>IN</b> Iron<br><b>RD</b> Red<br><b>BZ</b> Bronze | <b>SF</b> Snap In Frosted Acrylic Lens<br><b>MW</b> Matte White Lens<br><b>S.5</b> Specular Parabolic Louver<br><b>PLA</b> White Cubed Acrylic Louver<br><b>LVA</b> Bladed Louver Semi Specular Prismatic Acrylic #12 Pattern | <b>30</b> 3000K<br><b>35</b> 3500K<br><b>40</b> 4000K<br><b>50</b> 5000K | <b>H4W</b> HC401 4ft. Cable kit with 3 wire power feed. White Canopy.<br><b>H8W</b> HC402 8ft. Cable kit with 3 wire power feed. White Canopy.<br><b>H4W5</b> HC401 4ft. Cable kit with 5 wire power feed. White Canopy.<br><b>H8W5</b> HC402 8ft. Cable kit with 5 wire power feed. White Canopy. |  |   |

NOTE: Custom length available. Consult factory for additional information

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.







JOB NAME:

CAT#:

TYPE:

**SQ45P4X4**

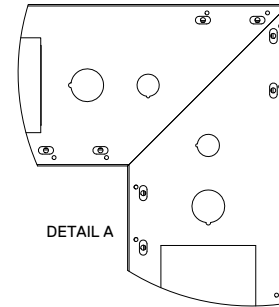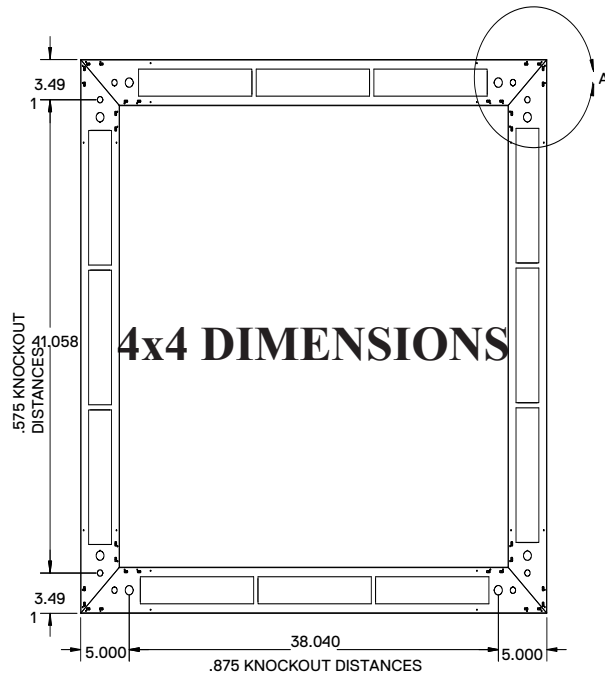

**SQ45P8X8**

