



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Specification grade, low profile direct/indirect wall mount with up and forward throw optics, a sleek wall mount companion to the pendant mount indirect. This wall mount is ideal for brightening perimeters of offices or spectacular wall lighting systems for corridors. Matches with our LI Series for a consistent look.

Housing is die-formed and embossed code 20 gauge steel with die cast aluminum end caps. Standard finish is powder coat white. Custom colors available. An enhanced white aluminum reflector is included.

FEATURES & BENEFITS


- Continuous row mounting
- Post Painted Powder Coat finish
- White standard, custom colors are available
- Wall bracket mount
- CETLUS Listed for damp locations

DIMENSIONS




4-FOOT MODEL

TOP VIEW




8-FOOT MODEL

TOP VIEW



END VIEW

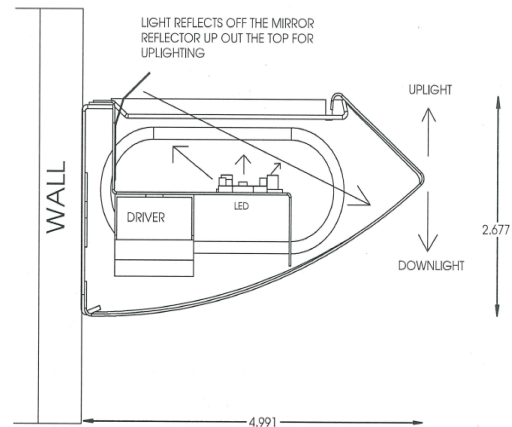



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: LIW MP 48 LED 32 DMV WH 30

LIW		LED					7. FINISH	
1. SERIES	2. BODY TYPE	3. SIZE	4. GEAR	5. WATTAGE/LUMENS		6. DRIVER		
LIW LED Direct/ Indirect Wall Mount	MP Perforated	48 48"	LED	4 ft.		DMV 120-277V Multivolt 0-10V Dimmable	WH White (std.)	
	MS White Lens	96 96"		36 36 Watts 3600 Lumens	BK Black			
	MB Louver			54 54 Watts 5400 Lumens	SL Silver			
				72 72 Watts 7200 Lumens	BZ Bronze			
				8 ft.				
				108 108 Watts 10800 Lumens				

8. COLOR TEMP	9. EMERGENCY(O) ¹	10. CONFIGURATION	
30 3000K	EM Emergency Battery Pack 10W ~1300 Lumens	BLANK	Individual
35 3500K		-B	Beginner Run
40 4000K	EM7 Emergency Battery Pack 7W ~900 Lumens	-E	Ender Run
50 5000K	EM5 Emergency Battery Pack 5W ~650 Lumens	-J	Joiner

NOTES:

¹O is optional

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.