

JOB NAME:
CAT#:
TYPE:

ILLUMINATION

- Ultra bright, energy efficient, long life red or green LEDs
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination
- Double face utilizes factory installed silver or white mylar background panel

ELECTRICAL

- Dual 120/277 voltage standard
- Unique bi-color LED indicator light alerts occupant on battery condition (green-normal, red-check battery)
- Push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only)
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



MOUNTING

- EZ-snap mounting canopy included for top, end, or back mount


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high impact resistant, thermoplastic in silver, white or black finish
- Self-adhesive chevron appliques and guide template provided for directional indication

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for damp locations (0°C-50°C)
- Certified to CEC under Title 20 regulations

DIMENSIONS

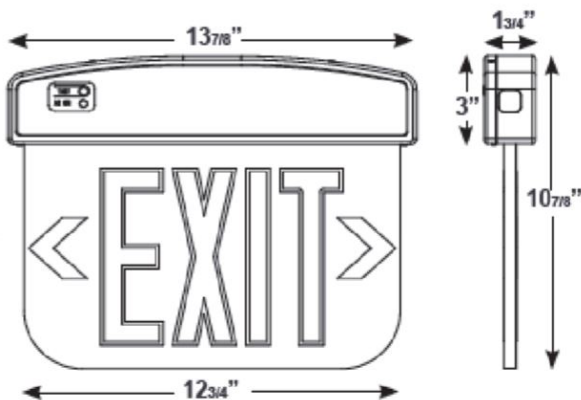

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: PLELRXTEU 2 R W W

PLELRXTEU

1. MODEL	2. # OF FACES	3. LETTER COLOR	4. PANEL	5. HOUSING COLOR	6. BATTERY
PLELRXTEU	1	Single Face	R Red	C Clear ¹	W White
	2	Double Face	G Green	M Mirror W White	B Black A Aluminum
					(blank) AC Only EM Battery Backup

7. DIAGNOSTICS (O) ²	8. CIRCUITING (O) ²	9. VOLTAGE (O) ²	10. WORDING (O) ²
SDT Self-Diagnostics ³	2C-120 Dual Circuit with 120V input ⁴ 2C-277 Dual Circuit with 277V input ⁴	SPV 208/220/240 Volt, 50/60Hz ⁵	CUSTOM Custom Wording

Notes:

- ¹With single face only
- ²(O) is optional
- ³Available only with EM units
- ⁴Available only with AC units
- ⁵Not available with SDT

Dimensions and specifications subject to change without notice.

