



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS

The RDISE LED is a specification grade, Volumetric Recessed LED Luminaire which provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened appearance to the modern office environment.

Housing is die-formed and embossed code 22 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Center diffuser snaps into place; no tools are required for removal.




### FEATURES & BENEFITS

- Volumetric recessed luminaire provides a low glare light source
- Matte white reflective surface for soft, uniform light distribution
- 0-10V dimming driver standard
- Easy access plate for quick wiring
- IC rated
- cETL<sub>us</sub> Listed for damp locations up to 67 watts
- Min CRI 82

### DIMENSIONS

#### 1x4 VIEW

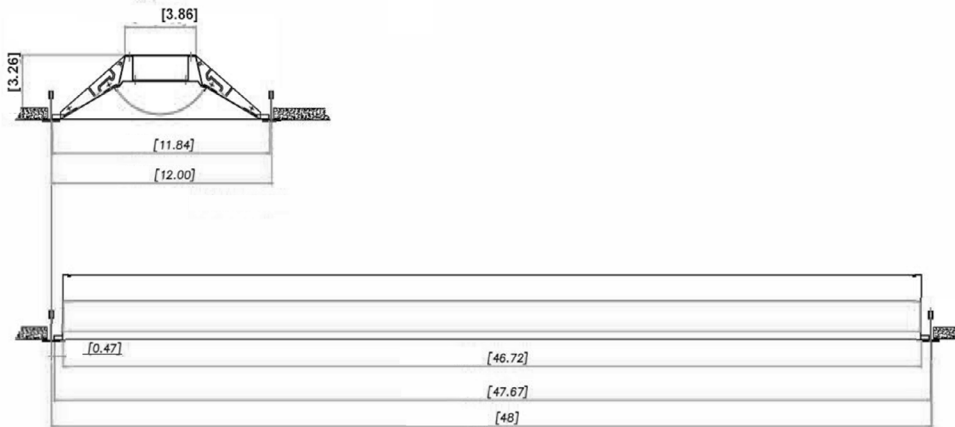




JOB NAME:

CAT#:


TYPE:

**DIMENSIONS**

**2x2 VIEW**

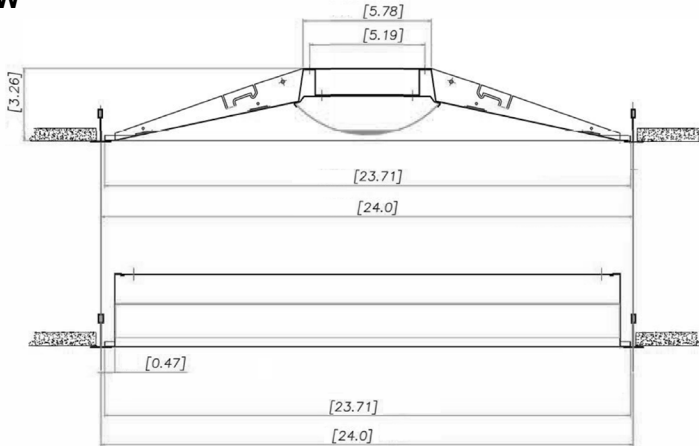

**2x4 VIEW**

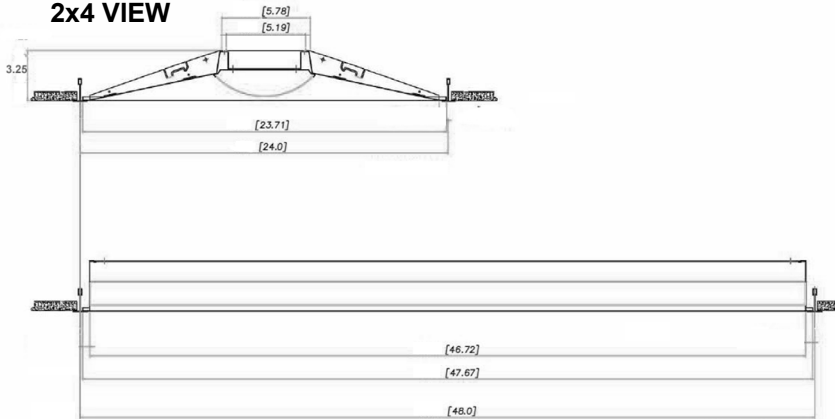



JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: RDISE 14 LED 15 DMV FR 30 EM SNS200

RDISE		LED		5. DRIVER		7. COLOR TEMP	
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS <sup>1</sup>			6. LENS	
<b>RDISE</b>	<b>14</b> 1X4	<b>LED</b>	<b><u>1x4 Standard</u></b>		<b>DMV</b>	<b>FR</b> Frosted Lens	<b>30</b> 3000K
	<b>22</b> 2x2		<b>15</b> 15 Watts 1950 Lumens	0-10V Dimmable			<b>35</b> 3500K
	<b>24</b> 2x4		<b>20</b> 20 Watts 2600 Lumens	Step dimming			<b>40</b> 4000K
			<b>25</b> 25 Watts 3250 Lumens	Multivolt	<b>50</b> 5000K		
			<b>33</b> 33 Watts 4290 Lumens	<b>D347V</b>			
			<b><u>2X2 Standard</u></b>		347VAC 0-10V Dimming		
			<b>15</b> 15 Watts 1950 Lumens	<b>D120</b>	Triac Dimming		
			<b>20</b> 20 Watts 2600 Lumens	<b>D277</b>	120VAC		
			<b>25</b> 25 Watts 3250 Lumens		Triac Dimming		
			<b>33</b> 33 Watts 4290 Lumens		277VAC		
			<b><u>2X4 Standard</u></b>				
			<b>20</b> 20 Watts 2800 Lumens				
			<b>25</b> 25 Watts 3500 Lumens				
			<b>30</b> 30 Watts 4200 Lumens				
			<b>35</b> 35 Watts 4900 Lumens				
	<b>40</b> 40 Watts 5600 Lumens						
	<b>45</b> 45 Watts 6300 Lumens						
	<b>54</b> 54 Watts 7560 Lumens						

8. EMERGENCY (O) <sup>2</sup>	
<b>EM</b>	Emergency Battery Pack 10W ~ 1700 lumens
<b>EM5</b>	Emergency Battery Pack 5W ~ 850 Lumens

9. SENSOR (O) <sup>2</sup>	
<b>SNS200</b>	Occupancy Sensor w/ Daylight Harvesting

**Notes:**  
<sup>1</sup>Consult for other wattages  
<sup>2</sup>(O) is optional

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

