



JOB NAME:


CAT#:

TYPE:

APPLICATIONS

The THL Series creates a new opportunity to transform your space with cost efficient LED highbay fixtures. THL Series fixtures are ideally suited for warehouses, manufacturing plants, sports facilities and retail spaces. A precision-formed reflector is combined with high output LED strips to provide maximum light output for ceilings from 15 feet to 40 feet. This arrangement is ideal for wide area lighting to put the light exactly where you need it with less fixtures.

Air vents surround the drivers in the back of the fixture to maximize LED and driver performance, reliability and life. High reflective enhanced white reflectors are computer designed to maximize photometric performance and put the light where you need it. Access plate in the back makes wiring fast and hassle-free.

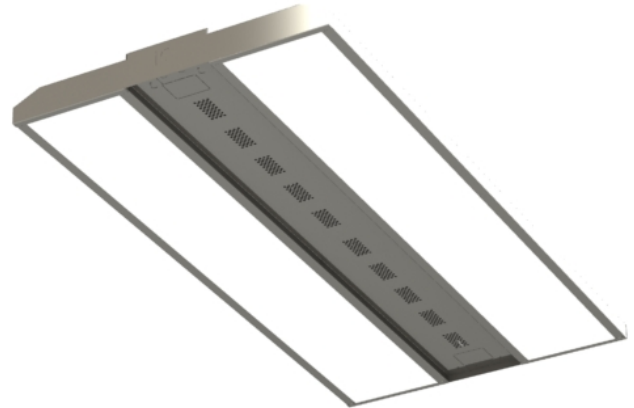

FEATURES & BENEFITS

- Pendant or chain mount for high ceilings
- Many lumen package / wattage options via programmable drivers
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K)
- Emergency battery backup options available
- CRI >80
- >50,000 hrs of L70 LED life
- Rated for dry and damp locations
- 0-10 Volt dimmable 120-277VAC (347-480VAC dimming avail)
- Power factor >0.90
- 5 year warranty

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING - 120-277V

EXAMPLE: THL P FR 20X48L B 210 DMV WH 35K

THL

1. SERIES	2. MOUNTING	3. DIFFUSER	4. WIDTH X LENGTH	5. GEAR	6. WATTAGE/LUMENS	7. DRIVER
THL	P Pendant	FR Frosted	20X24L 23"W x 24"L 20X48L 23"W x 48"L	B	<p>20X24L</p> <p>105 105 Watts 15000 Lumens 125 125 Watts 18000 Lumens 165 165 Watts 24000 Lumens</p> <p>20X48L</p> <p>210 210 Watts 30000 Lumens 250 250 Watts 35000 Lumens 285 285 Watts 41000 Lumens 325 325 Watts 47000 Lumens 360 360 Watts 52000 Lumens</p>	DMV 120-277V Multivolt 0-10V Dimmable

8. FINISH	9. CCT	10. EMERGENCY (O)
WH White	30K 3000K	EM14 14W Emergency Battery Backup
SL Silver	35K 3500K	EM20 20W Emergency Battery Backup
	40K 4000K	
	50K 5000K	

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.



JOB NAME:

CAT#:

TYPE:

ORDERING - 347-480V

EXAMPLE: THL P FR 20X48L B 245 DHV WH 35K

THL

1. SERIES	2. MOUNTING	3. DIFFUSER	4. WIDTH X LENGTH	5. GEAR	6. WATTAGE/LUMENS	7. DRIVER
THL	P Pendant	FR Frosted	20X24L 23"W x 24"L 20X48L 23"W x 48"L	B	20X24L 95 95 Watts 13000 Lumens 125 125 Watts 19000 Lumens 170 170 Watts 24000 Lumens 20X48L 190 190 Watts 26000 Lumens 245 245 Watts 36000 Lumens 285 285 Watts 41000 Lumens 325 325 Watts 46000 Lumens 375 375 Watts 52000 Lumens	DHV 347-480VAC

8. FINISH	9. CCT	10. EMERGENCY (O)
WH White	30K 3000K	EM14 14W Emergency Battery Backup
SL Silver	35K 3500K	EM20 20W Emergency Battery Backup
	40K 4000K	
	50K 5000K	

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.



JOB NAME:


CAT#:

TYPE:

DRAWINGS & IMAGES

Fixture Size	W	L	W _H	L _H
THLPFR20X24L	23.00"	24.02"	3.00"	21.97"
THLPFR20X48L	23.00"	48.02"	3.00"	45.97"

Hanging Point Dimensions

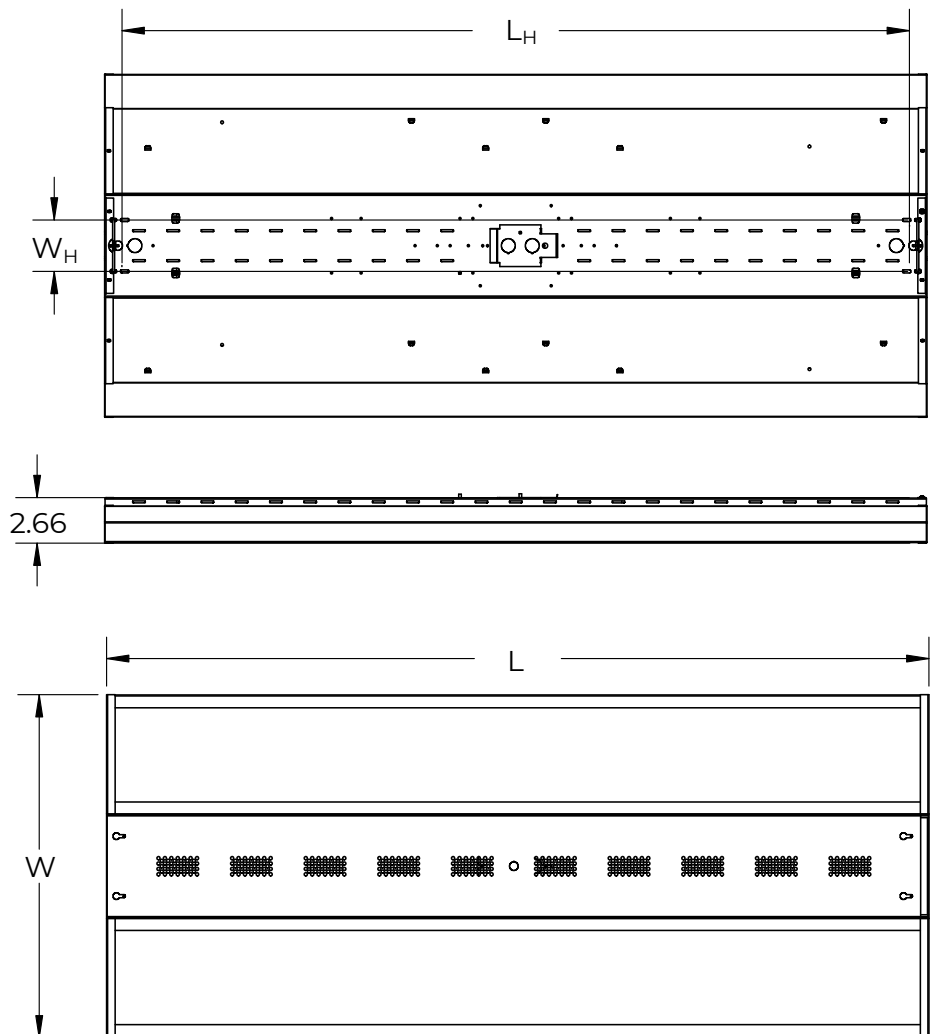

Dimensions and specifications subject to change without notice.