



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS

This stylish ceiling/wall mounted luminaire comes in a standard white finish with a variety of LED combinations and sizes enhanced by linear sided acrylic diffuser. It is designed for baths, kitchens, rec rooms, corridors, aisles, stairwells, over or beside mirrors, over bulletin boards, in vanities, in displays.

All metal parts are die formed from heavy gauge cold roll steel with overlapping end caps. The diffuser is a linear sided prismatic lens of extruded acrylic for controlled light.


### FEATURES & BENEFITS

- Back plate provided with adequate knockouts and mounting holes for either wall or ceiling installation
- Clear acrylic prismatic lens with linear ribbed sides standard
- White with a variety of LED combinations
- Overlapping end caps for uniformity and dimensional stability
- Min CRI 80
- ETL<sub>us</sub> Listed for damp locations




### DIMENSIONS


#### 2 FT

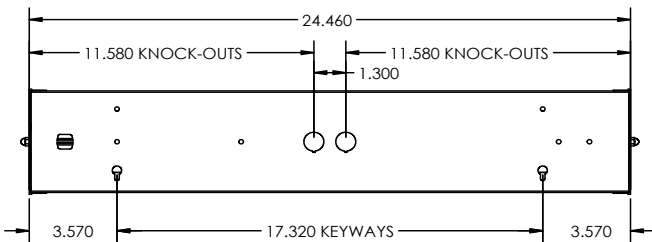

#### 4 FT

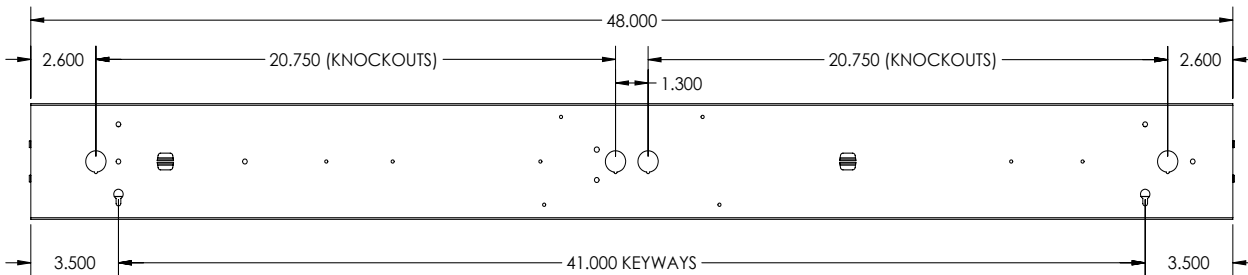

#### END VIEW

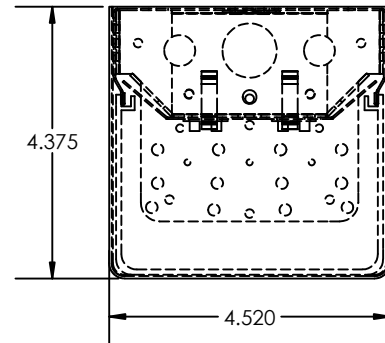

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: 155 24 LED 24 DMV 40

155		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. HOUSING		7. COLOR TEMP	
155	24 24" 48 48"	LED	<u>2 Ft.</u>		DMV	120-277V Multivolt 0-10V Dimmable	WH	White	30	3000K
			24	24 Watts 2250 Lumens	SDMV	Step dimming Multivolt	BK	Black	35	3500K
			28	36 Watts 2250 Lumens			CH	Chrome	40	4000K
			35	35 Watts 3200 Lumens	DHV	347-480VAC 0-10V Dimming	(Endcaps only)		50	5000K
			<u>4 Ft.</u>		D347V	347VAC 0-10V Dimming				
			30	30 Watts 4065 Lumens	D120	Triac Dimming 120VAC				
			48	48 Watts 5985 Lumens	D277	Triac Dimming 277VAC				
			57	57 Watts 6855 Lumens	D1MV	120-277V Multivolt 0-10V Dimmable (dim to 1%)				
			72	72 Watts 7000 Lumens						

<b>8. EMERGENCY (O)<sup>1</sup></b>	<b>9. WHIP (O)<sup>1</sup></b>	<b>10. LENS (O)<sup>1</sup></b>	<b>11. DIVIDER/FRONT SHIELD (O)<sup>1</sup></b>
EM Emergency Battery Backup	WP 6' whip 3 wire WP5 6' whip 5 wire CS6 6' cord 3 wire	OA Opal acrylic lens	Blank No divider D Divider only F Front shield only T Top shield only DF Divider & front shield TF Top & front shield

**DLC INFORMATION**

DLC Listed (4 ft DMV only)	
155-48LED30DMVxx	XX=30, 35,40, 50
155-48LED48DMVxx	XX=30, 35,40, 50
155-48LED57DMVxx	XX=30, 35,40, 50



**Notes:**

<sup>1</sup>(O) is optional

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

