


# CUR Grid Installation Instructions

## Overview

### WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting [www.saylite.com/warnings](http://www.saylite.com/warnings).

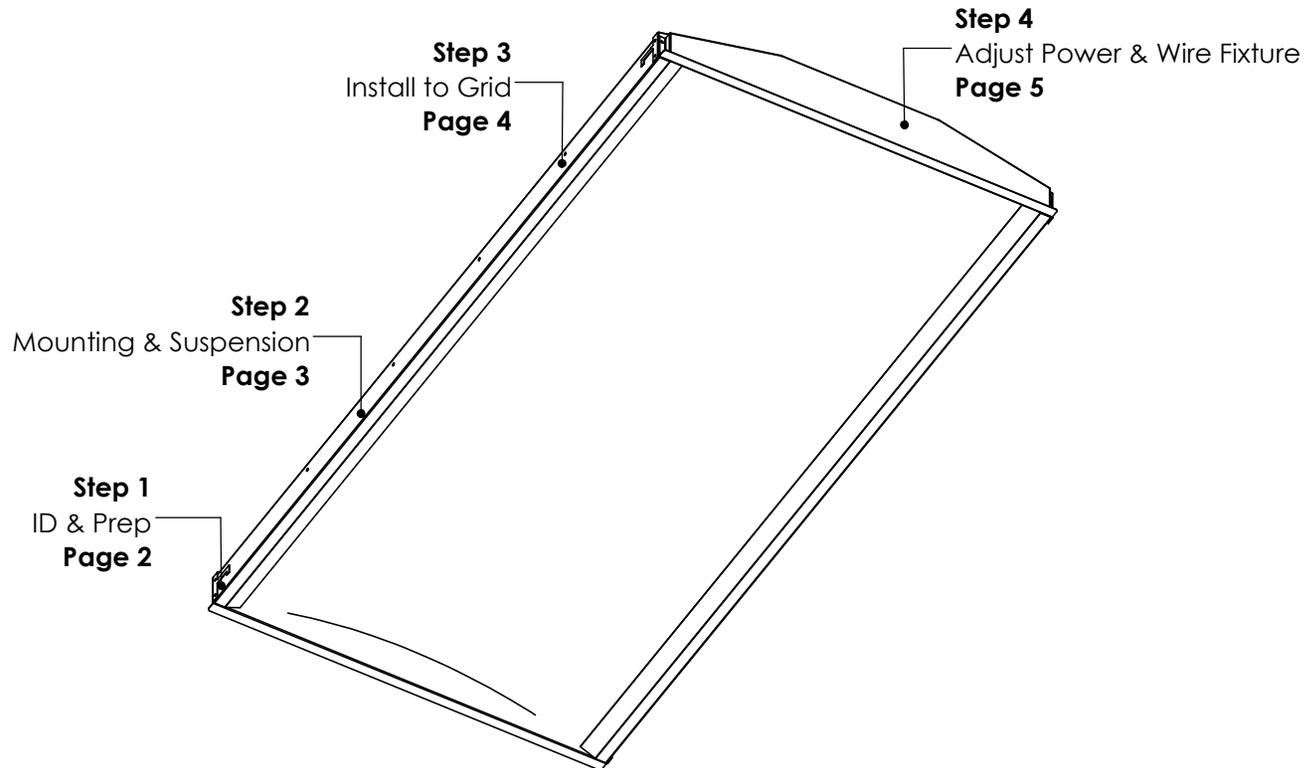


Your particular build may vary.

2022© Saylite | 2055 Luna Road, Suite 142 Carrollton, Texas 75006 | [www.saylite.com](http://www.saylite.com)

# CUR Grid Installation Instructions

## Step 1 - Identification & Preparation

### A. Identify Fixtures

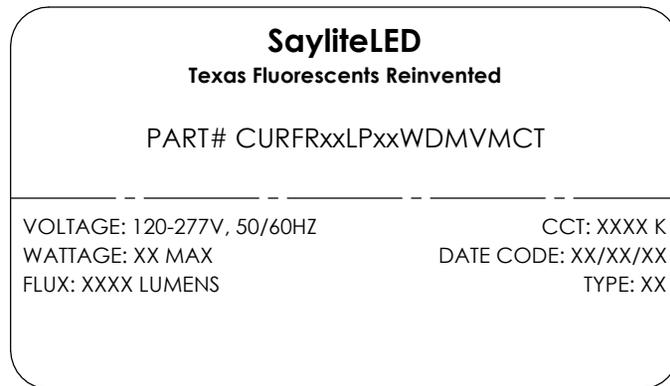


- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.

### B. Tools Needed



Screwdriver

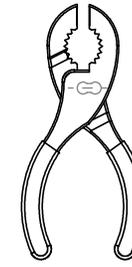

Pliers



Utility Knife



Safety Glasses

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.


### Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.

# CUR Grid Installation Instructions


## Step 2 - Mounting and Suspension

### A. Transfer Fixture Measurements

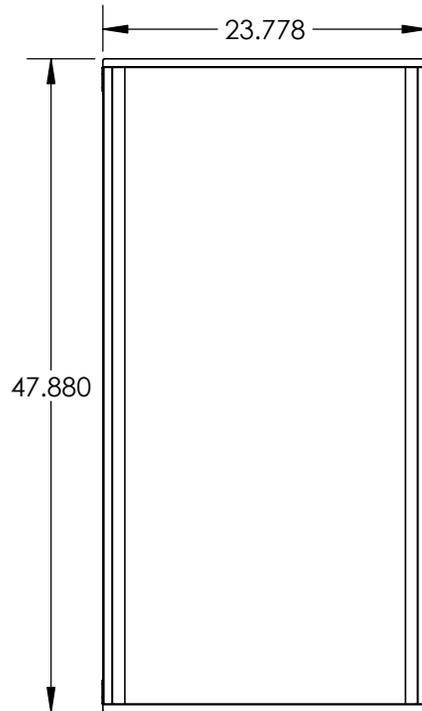

- Note the length and width of the fixture.
- Transfer the dimensions to the hanging grid and set the grid rails to the proper width.

### B. Cut Grid to Fit (Optional)

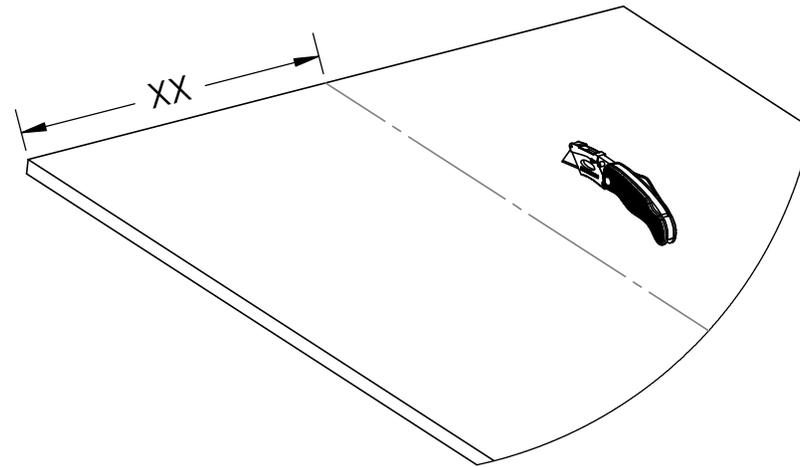


- Optional: Cut ceiling tiles to fit custom fixture spaced grids.

**\*NOTE:** Length and width dimensions will vary according to specific fixture model being installed. Measure each fixture to be installed to ensure the grid spacing is correct.

# CUR Grid Installation Instructions


## Step 3 - Install Fixture Into Grid

### A. Lay Fixture Into Grid

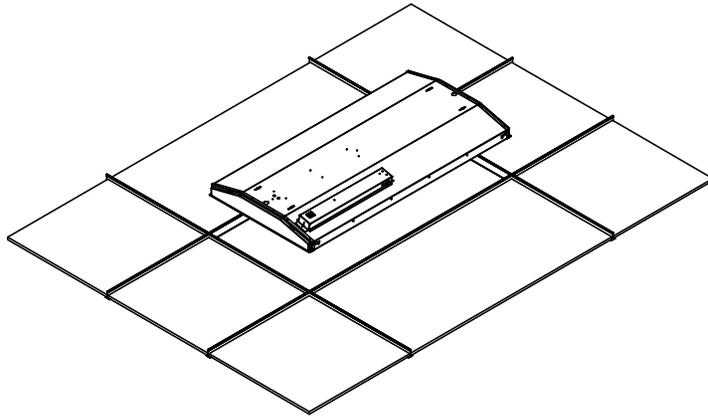

- Lay the fixture into the grid, ensuring that the flanges on each side of the fixture are resting on the grid.

### B. Bend Hurricane Clips Out

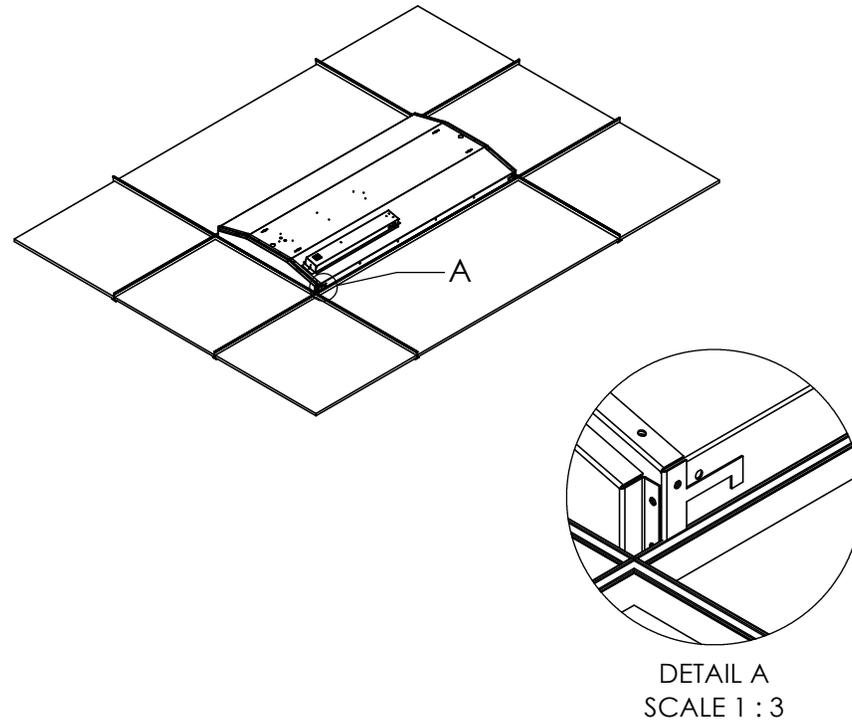


- Bend the hurricane clips located at each corner of the fixture outward 90° such that the clips are clearly hanging over the grid rails.

# CUR Grid Installation Instructions


## Step 4 - Adjust Power/CCT & Wire Fixture

### A. Adjust Power & CCT Settings

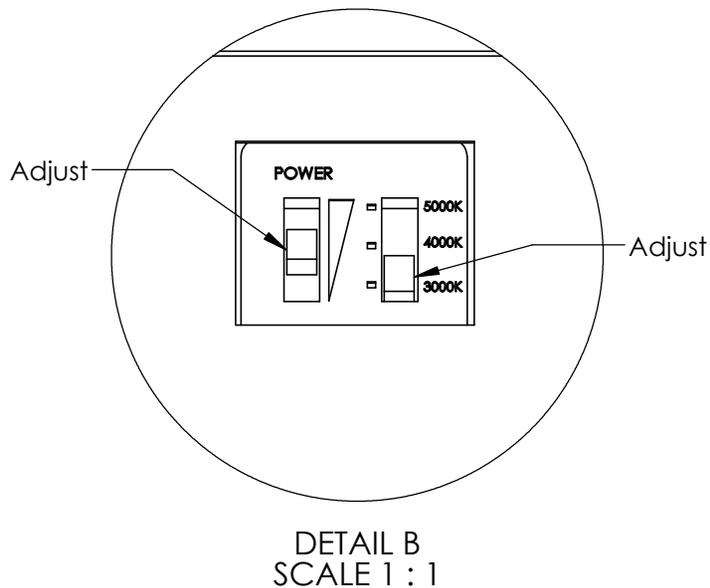

- Locate power and color temperature switches on the back of the fixture.
- Adjust the power and color temperature to desired outputs by sliding the switches up or down the controller.

### B. Wire Fixture to Power Feed Supply

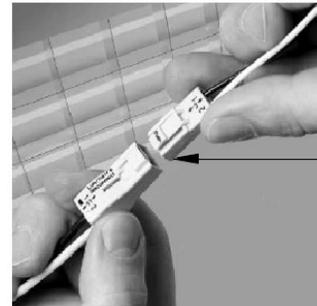

WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- Wire each fixture to the incoming power supply using the provided quick disconnect clip as shown.
- For dimming option, refer to wiring legend above.
- Use UL approved connectors only. Follow all local, state and national codes.
- Fixture installation is now complete.