

APPLICATIONS

Economically designed narrow wraparound provides reliable and efficient lighting. Ideal for use in indoor applications such as homes, modular homes, mobile homes, stores and public building where low glare and ease of installation is required.

FEATURES & BENEFITS

- ◆ 0-10V Dimming Driver standard
- ◆ Corrosion and scratch resistant
- ◆ Nominal 9" width with a shallow design
- ◆ Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- ◆ Diffuser self-aligns and hinges from either side for easy maintenance
- ◆ Available in lengths from 24 to 48 inches - (2' & 4' lengths)
- ◆ Single or continuous row mounting capability
- ◆ Surface, stem or chain mountable
- ◆ ETL Listed for damp location
- ◆ L70- Reported $\geq 54,000$ hours (calculated=115,000 hours)
- ◆ Min CRI 82
- ◆ Made with US Steel
- ◆ BAA/ARRA Compliant



SPECIFICATIONS


Housing and ends are die-formed and embossed from cold rolled steel. Inspection knockouts provided for mounting to junction box. Driver cover snaps into place eliminating the need for tools when accessing. Diffuser hinges from either side in a lift and shift manner and is self-centering. End caps may be butted together for continuous row mounting. Knockouts are provided for stem mounting.

ORDERING DATA

EXAMPLE: 770-24PLED22DMV40

Series	Length	Suffix	Gear	Wattage / Lumens	Driver	Color Temp	Options
770 LED Premium Wrap	24 24" 48 48"	P (Professional)	LED	2 ft. 22 22 Watts 2650 Lumens 4 ft. 37 37 Watts 4520 Lumens	DMV 120-277 VAC 0-10V Dimmable	30 3000K 35 3500K 40 4000K 50 5000K	WP 6' whip, 3 wire EM 10W, 1200 Lumen Battery backup EM5 5W, 600 Lumen Battery backup EM7 7W, 840 Lumen Battery backup EM4F Emergency Battery Pack, 4W ~450 Lumens

DIMENSIONS

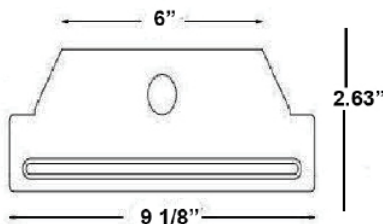

* Consult for other options

Values based on ambient temp of 25°C and 4000K
 Lumens are subject to a tolerance of $\pm 10\%$
 Wattage is approximate and subject to a tolerance of $\pm 5\%$
 Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
 8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE