

FEATURES & BENEFITS

ILLUMINATION

- ◆ Ultra-bright, energy efficient, long lasting white LEDs provide uniform illumination
- ◆ Single or double face configuration

ELECTRICAL

- ◆ Dual 120V/27V
- ◆ Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- ◆ 4.8V long life, maintenance free, rechargeable Ni-Cd battery (EM models only)
- ◆ Internal solid-state transfer switch automatically connects the internal battery to LED board for 120 minute emergency illumination
- ◆ Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING

- ◆ Mounting canopy included for top or end mount
- ◆ Universal K/O pattern on back plate for wall mount

HOUSING

- ◆ 20-gauge steel housing
- ◆ Neutral white finish



WARRANTY / LISTING


- ◆ Five year warranty on all electronics and housing. Battery pro rated for five years
- ◆ Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- ◆ UL Listed for damp locations (0°-50°C)
- ◆ Meets city of Chicago requirements

ORDERING DATA

EXAMPLE: MEBCAXTEU1RWNA

MEBCAXTEU						
Series	# of Faces	Letters	Housing Color	Battery	Directional Arrow	
MEBCAXTEU	1 Single Face 2 Double Face	R Red	W White B Black	Blank AC only EM Ni-Cd battery	NA	Exit No Arrow
					DA	Exit Double Arrow
					RA	Exit Right Arrow
					LA	Exit Left Arrow
					LARA**	Exit Left/Right Arrow
					SWLA	Stairs Left Arrow
					SWNA	Stairs No Arrow
					SWDA	Stairs Double Arrow
					SWRA	Stairs Right Arrow
					SWLARA**	Stairs Left/Right Arrow

DIMENSIONS

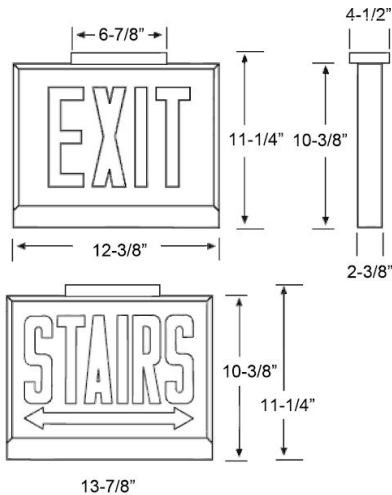

*Available only with single face units
**Available only with double face units



Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE