



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The CUR Series provides soft, efficient lighting and is a perfect fit for offices, lobbies, and retail spaces. CUR fixtures create a clean, professional look that can accompany varying aesthetics and styles. The added wattage dimming and color selection switch gives customers several light options to meet the requirements of any space.

Fixture housing is made of 22 gauge steel, powder coated with high reflectance white paint to provide optimal light output.

CUR fixtures are designed for grid mounting only.



FEATURES & BENEFITS

- 2 standard sizes – 2ft x 2ft & 2ft x 4ft
- Many lumen package / wattage options via 4 position switch
- Multiple Kelvin temperature options (3000K, 3500K, 4000K) via 3 position switch
- Emergency battery backup options available
- CRI >80
- >50,000 hrs of L70 LED life
- Rated for dry and damp locations
- 0-10 Volt dimmable 120-277V
- Power factor >0.90
- 5 year warranty

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: CUR FR 22L P45M4950M DMV MCT EM

CUR

1. SERIES	2. LENGTH	3. HEIGHT	4. WATTAGE/LUMENS	5. DRIVER	6. CRI
CUR	FR Frosted	22L 24" X 24" 24L 24" X 48"	P45M4950M P55M6050M	DMV 120-277V Multivolt 0-10V Dimmable	MCT Multiple Color Temperature 3000K, 3500K, 4000K on a 3- positions switch
			22L Defaulted 45 Watts / 4950 Lumens 45 Watts / 4950 Lumens, 36 Watts / 3960 Lumens, 27 Watts / 2970 Lumens, 20 Watts / 2200 Lumens options on a 4-positions switch.		
			24L Defaulted 55 Watts / 6050 Lumens 55 Watts / 6050 Lumens, 4 Watts / 4840 Lumens, 33 Watts / 3630 Lumens, 25 Watts / 2750 Lumens options on a 4-positions switch.		

12. EM (O)⁵

EM 14Watt Emergency
Battery Backup⁵





JOB NAME:

CAT#:



TYPE:

DRAWINGS

2X2

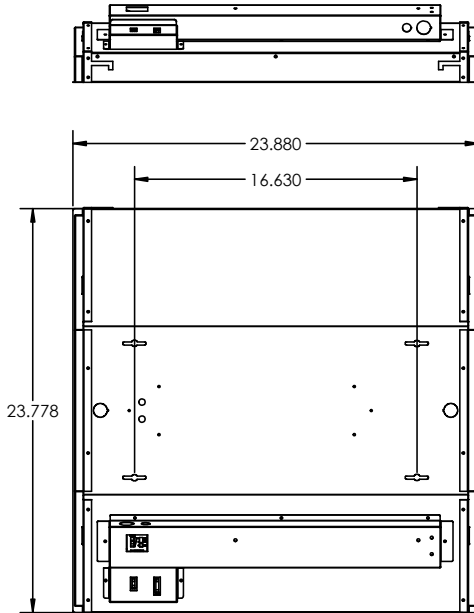

2X4

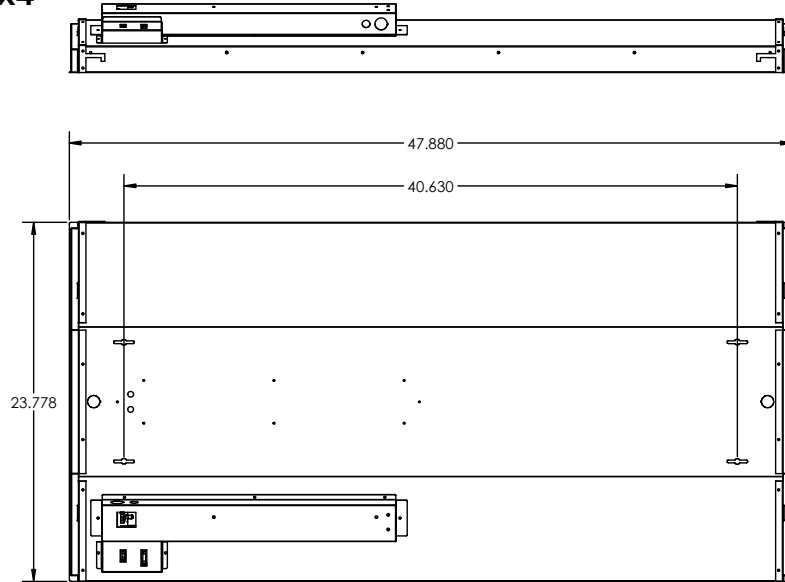

Dimensions and specifications subject to change without notice.